


HDMI Connector

SPECIFICATIONS



Current Rating: 0.5AMP
 Contact Resistance: 50m Ω Max.
 Insulation Resistance: 100M Ω Min.
 Withstanding Voltage : 500V AC/Minute
 Operation Temperature: -25°C to +80°C
 Contact Material: Copper Alloy
 Contact plating: Au or Tin Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: LCP+30%GF
 Shell: Boss ,Ni Plated

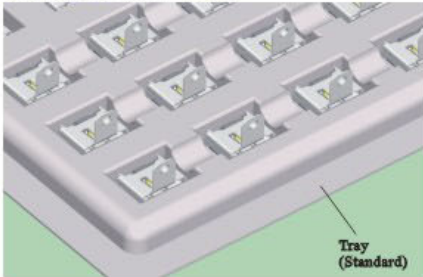

6510-19FHMXX01XW01



6510-19FHMXX01XW02

6510-19F XX XX XX X X 0X




CONTACT TYPE
 VM:180°SMT Upright
 HM:90°SMT Horizontal
 D2:90°Two Row DIP
 D3:90°Three Row DIP
 D4:90°Four Row DIP

CONTACT PLATING
 G0:1u" Gold S0:1u" Gold/Tin
 G1:3u" Gold S1:3u" Gold/Tin
 G2:5u" Gold S2:5u" Gold/Tin
 G3:10u"Gold S3:10u"Gold/Tin
 G4:15u"Gold S4:15u"Gold/Tin
 G5:30u"Gold S5:30u"Gold/Tin
 G6:20u"Gold S6:20u"Gold/Tin
 SN:Tin

SHELL TYPE
 00:DIP Without Screw eye
 01:DIP With Screw eye
 02:DIP With Screw eye in both side
 03:SMT Without Screw eye
 04:SMT With Screw eye
 05:SMT With Screw eye in both side

SHELL MATERIAL
 B:Brass
 P:Phosphor Bronze
 S:Spcc

INSULATOR TYPE
 W:With Pillar
 N:Without Pillar

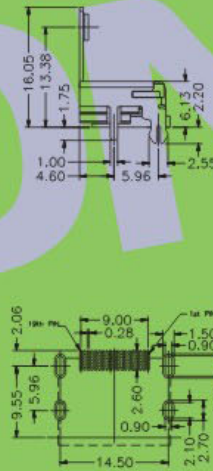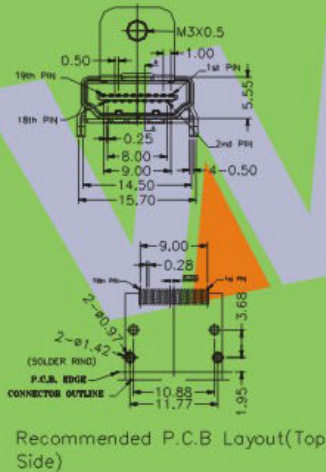

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418