



HDMI Connector

SPECIFICATIONS

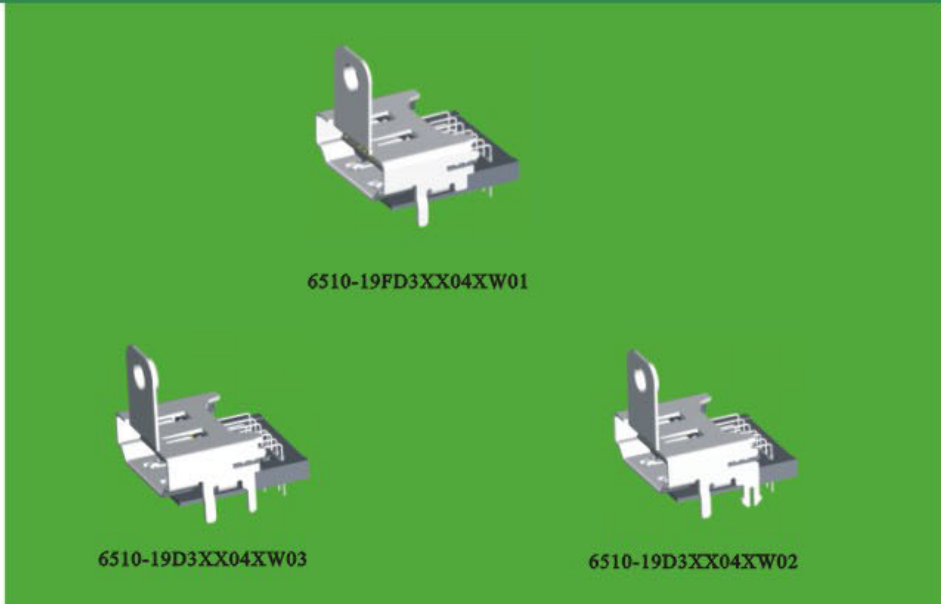


Current Rating: 0.5AMP
 Contact Resistance: 50m Ω Max.
 Insulation Resistance: 100M Ω Min.
 Withstanding Voltage : 500V AC/Minute
 Operation Temperature: -25°C to +80°C
 Contact Material: Copper Alloy
 Contact plating: Au or Tin Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PBT+30%GF
 Shell: Spcc ,Ni Plated

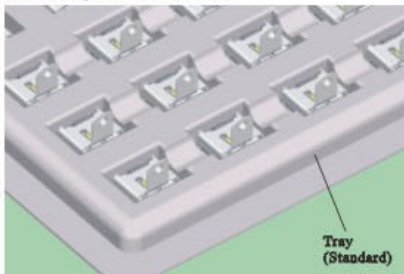

6510-19F XX XX XX X X 0X

CONTACT TYPE	CONTACT PLATING	SHELL TYPE	SHELL MATERIAL	INSULATOR TYPE
VM:180°SMT Upright	G0:1u" Gold	S0:1u" Gold/Tin	B:Brass	W:With Pillar
HM:90°SMT Horizontal	G1:3u" Gold	S1:3u" Gold/Tin	P:Phosphor Bronze	N:Without Pillar
D2:90°Two Row DIP	G2:5u" Gold	S2:5u" Gold/Tin	S:Spcc	
D3:90°Three Row DIP	G3:10u"Gold	S3:10u"Gold/Tin		
D4:90°Four Row DIP	G4:15u"Gold	S4:15u"Gold/Tin		
	G5:30u"Gold	S5:30u"Gold/Tin		
	G6:20u"Gold	S6:20u"Gold/Tin		
	SN:Sn			

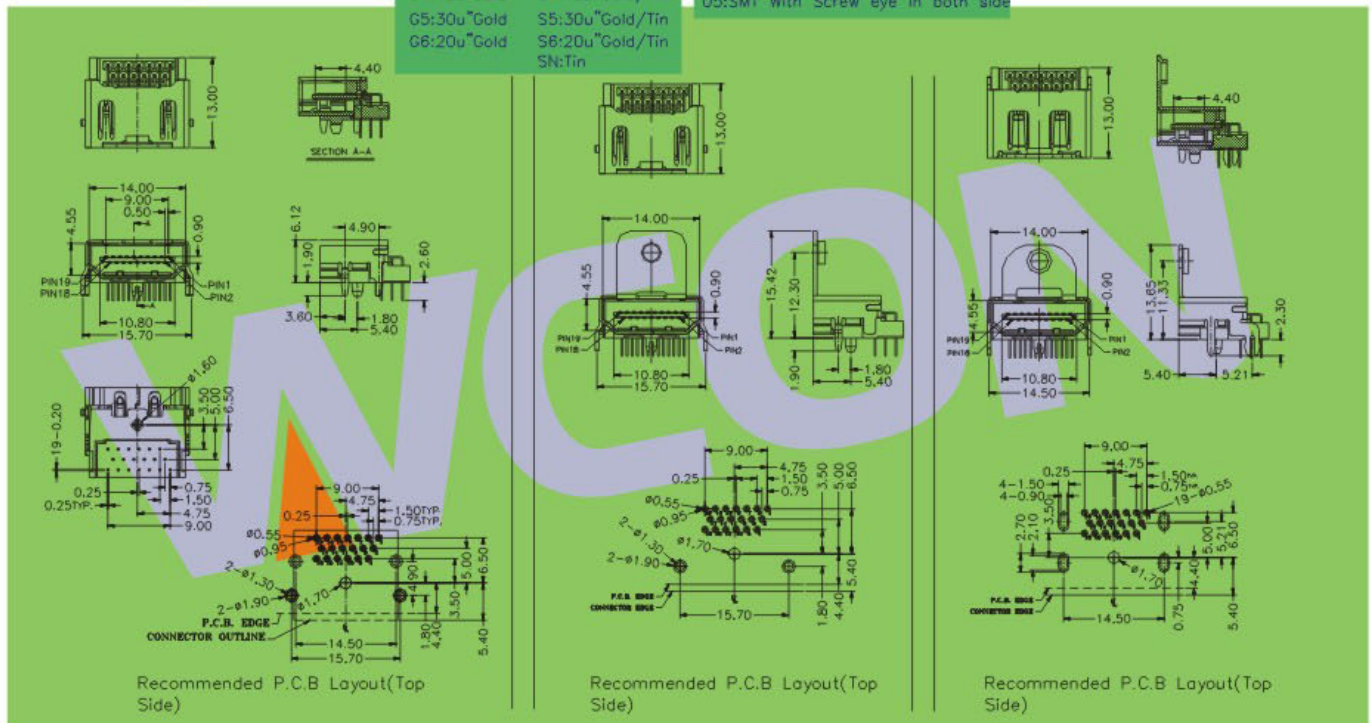

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418