

HDMI Connector

SPECIFICATIONS




Current Rating: 0.5AMP
 Contact Resistance: 50m Ω Max.
 Insulation Resistance: 100M Ω Min.
 Withstanding Voltage : 500V AC/Minute
 Operation Temperature: -25°C to +80°C
 Contact Material: Phosphor Bronze
 Contact plating: Au or Tin Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: LCP+30%GF
 Shell: Spcc ,Ni Plated



6510-19MXXA2XLX01



6510-19MXXA2XSX01

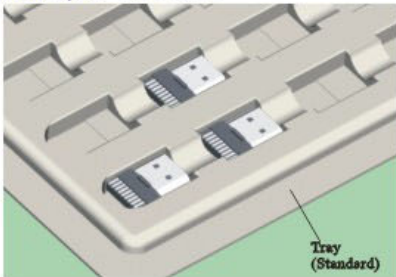

Tray (Standard)



6510-19 M XX A 2 X X X 01

CONTACT PLATING	
G0:1u" Gold	S0:1u" Gold/Tin
G1:3u" Gold	S1:3u" Gold/Tin
G2:5u" Gold	S2:5u" Gold/Tin
G3:10u"Gold	S3:10u"Gold/Tin
G4:15u"Gold	S4:15u"Gold/Tin
G5:30u"Gold	S5:30u"Gold/Tin
G6:20u"Gold	S6:20u"Gold/Tin
	SN:Tin

SHELL PLATING	
G0:1u" Gold	
G1:3u" Gold	
G2:5u" Gold	
G3:10u"Gold	
G4:15u"Gold	
G5:30u"Gold	
G6:20u"Gold	
SN:Tin Ni,Nickel	

SHELL SHAPE	
L:Long Shell	
S:Short Shell	

SHELL MATERIAL	
B:Brass	
P:Phosphor Bronze	
S:Spcc	

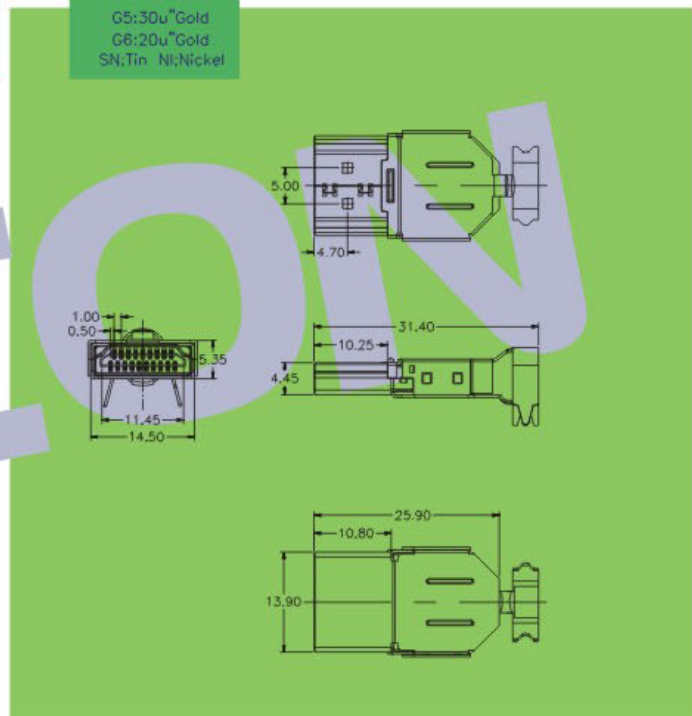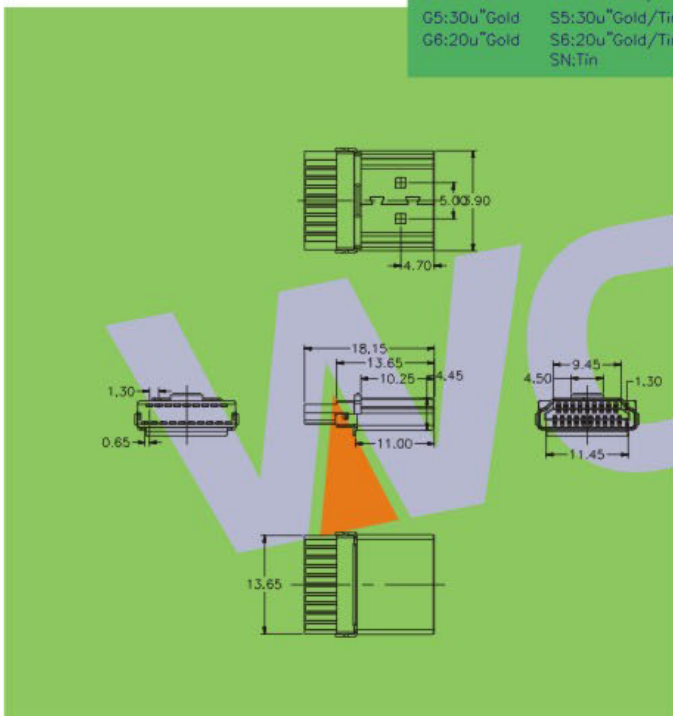

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418