




6231-24FXXW01

# DVI DIP Connector

## SPECIFICATIONS



Current Rating: 1.0AMP  
 Contact Resistance: 30m Ω Max.  
 Insulation Resistance: 2000M Ω Min.  
 Withstanding Voltage :500V AC/Minute  
 Operation Temperature: -55°C to +85°C  
 Contact Material: Phosphor Bronze  
 Contact plating: Au or Tin Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PBT+30%GF  
 Shell: ZINC ALLOY, Ni Plated

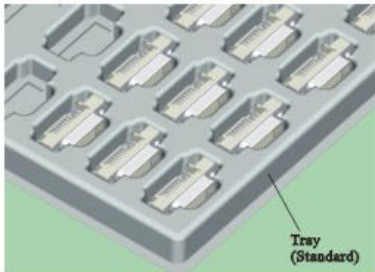

Tray  
(Standard)



6232-29FXXW01



6231-29FXXW01



6232-24FXXW







## 62XX- XX F XX X 01

CONNECTOR TYPE  
 31:DVI Straight  
 32:DVI Right Angle

NO. OF PINS  
 24:24  
 29:24+5

CONTACT PLATING  
 G0:1u" Gold S0:1u" Gold/Tin  
 G1:3u" Gold S1:3u" Gold/Tin  
 G2:5u" Gold S2:5u" Gold/Tin  
 G3:10u"Gold S3:10u"Gold/Tin  
 G4:15u"Gold S4:15u"Gold/Tin  
 G5:30u"Gold S5:30u"Gold/Tin  
 G6:20u"Gold S6:20u"Gold/Tin  
 Sn:Sn

INSULATOR COLOUR  
 B:Black W:White  
 U:Blue G:Grey

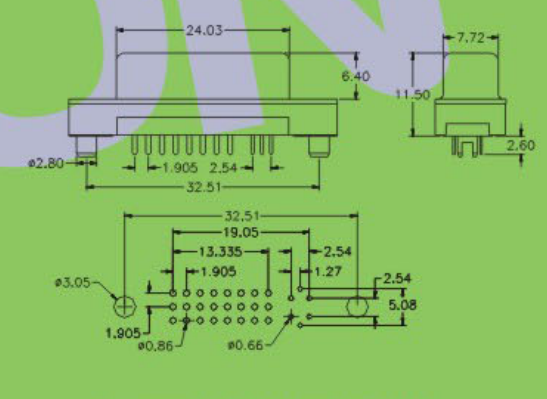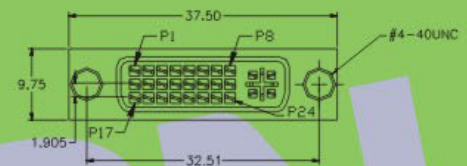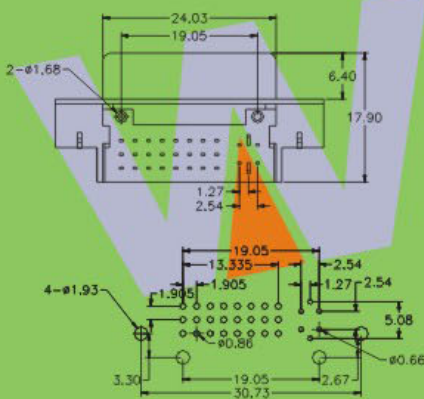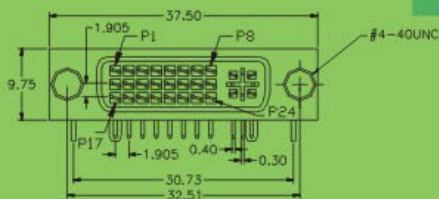

Recommended P. C. B Layout (Top Side)

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920  
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418