




1. 25mm FPC Connector

SPECIFICATIONS


Current Rating: 1.0AMP
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 500MΩ Min.
 Withstanding Voltage : 500V AC/Minute
 Operation Temperature: -25°C to +85°C
 Contact Material: Copper Alloy
 Contact plating: Tin Plated
 Insulator Material: Polyester (UL94V-0)
 StandArd: PA6T+30%GF

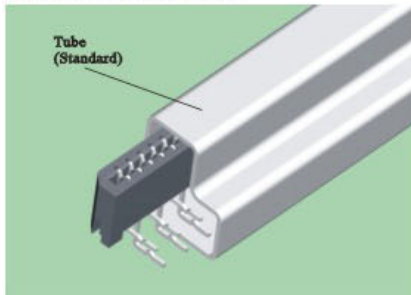


5121-XXRDDNX01



5121-XXRDDNX02



5121-XXSDDNX01





5121-XXSDDNX02

5121-XX X D D N X 0X

NO. OF PINS
 PER ROW
 03~30P

CONTACT SHAPE
 S: Straight
 R: Right Angle

INSULATOR COLOUR
 B: Black W: White
 E: Beige A: Brown

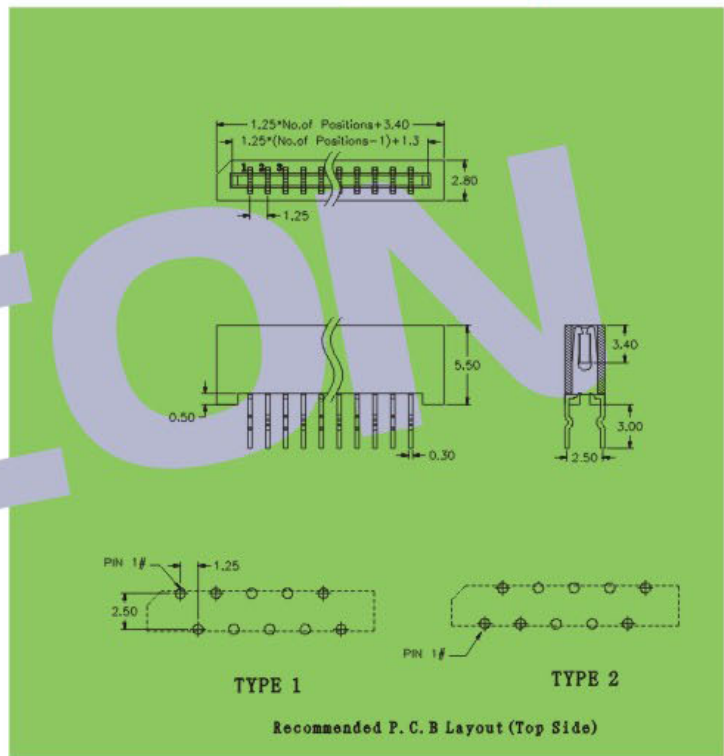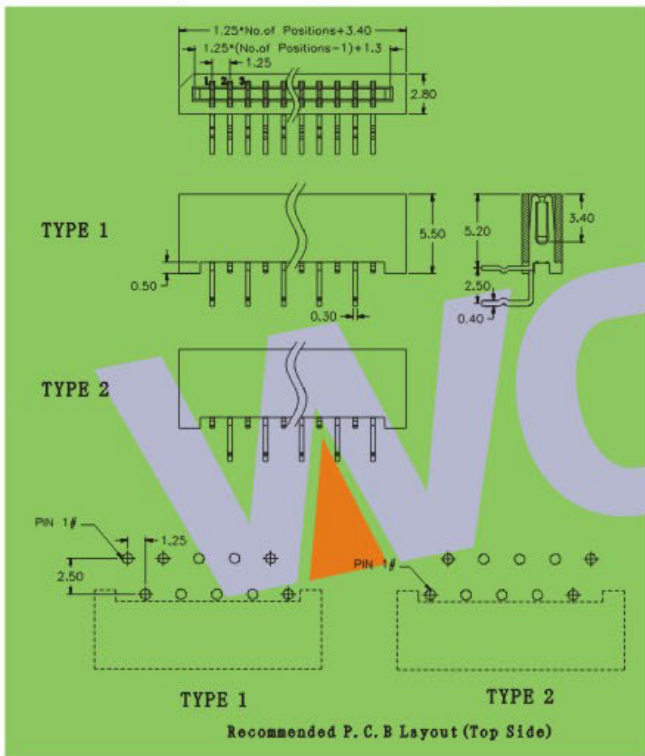

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418