


IEEE 1394 Connector

SPECIFICATIONS



Current Rating: 1.0AMP
 Contact Resistance: 30m Ω Max.
 Insulation Resistance: 1000M Ω Min.
 Withstanding Voltage : 500V AC/Minute
 Operation Temperature: -40°C to +85°C
 Contact Material: Brass
 Contact plating: Au or Tin Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA66+30%GF
 Shell: Brass, Ni Plated

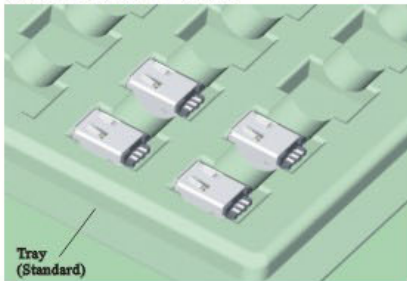

6133-SXXBD01





6133-SXXBD02

6133- S XX X D XX

CONTACT PLATING	
G0: 1u" Gold	S0: 1u" Gold/Tin
G1: 3u" Gold	S1: 3u" Gold/Tin
G2: 5u" Gold	S2: 5u" Gold/Tin
G3: 10u" Gold	S3: 10u" Gold/Tin
G4: 15u" Gold	S4: 15u" Gold/Tin
G5: 30u" Gold	S5: 30u" Gold/Tin
G6: 20u" Gold	S6: 20u" Gold/Tin
	SN: Tin

INSULATOR COLOUR	
B: Black	W: White
U: Blue	G: Grey

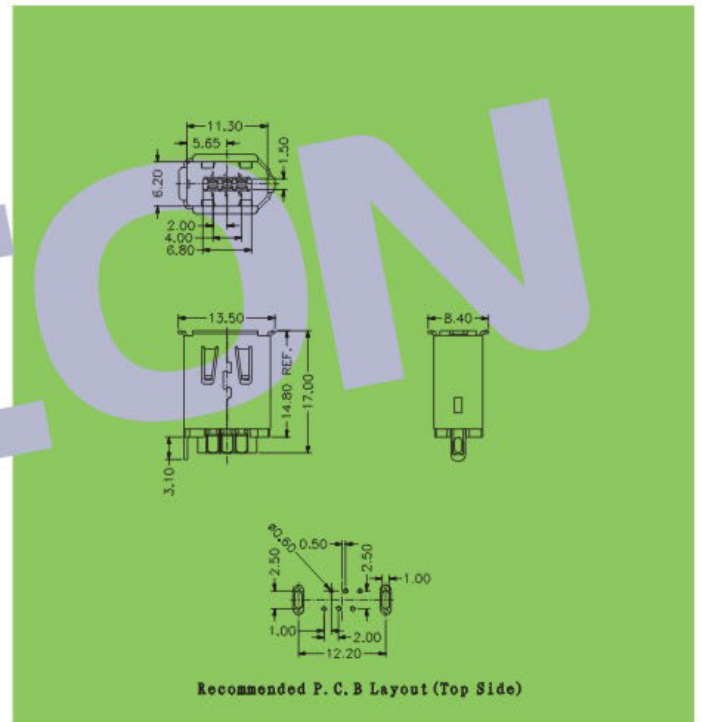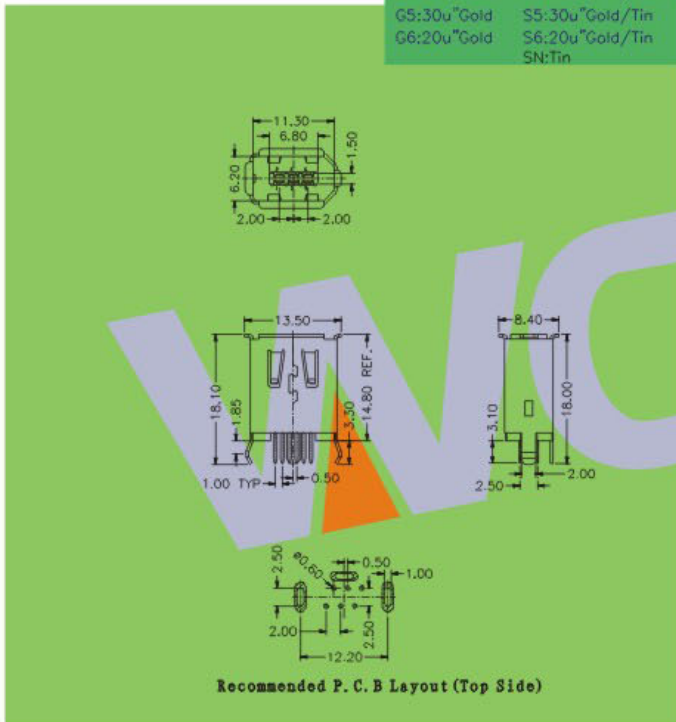

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418