




TERMINAL

2.5mm Battery Female Connector

SPECIFICATIONS




Current Rating: 5.0AMP
 Contact Resistance: 30mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Withstanding Voltage : 500V AC/Minute
 Operation Temperature: -40°C to +85°C
 Contact Material: Phosphor Bronze
 Contact plating: Au or Tin Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T+30%GF

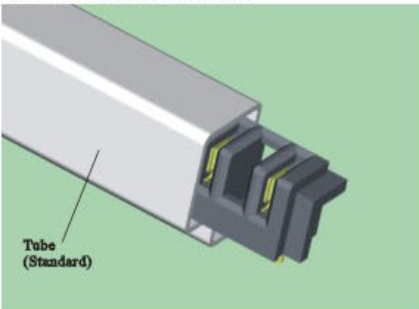

4120FXXX02DXX0X






4120FXXX01DXX0X








4120FXXX03DXX0X

4120 F XX X XX D XX 0 X

- NO. OF PIN**
4~9PIN
- TROUGH**
L=Left
R=Right
N:Without
- POLE POSITION**
00:Without Post
01:Post in Middle
02:Post on Left
03:Post on Side
- CONTACT PLATING**
G0:1u" Gold S0:1u" Gold/Tin
G1:3u" Gold S1:3u" Gold/Tin
G2:5u" Gold S2:5u" Gold/Tin
G3:10u"Gold S3:10u"Gold/Tin
G4:15u"Gold S4:15u"Gold/Tin
G5:30u"Gold S5:30u"Gold/Tin
G6:20u"Gold S6:20u"Gold/Tin
SN:Tin



PART NO.	DIM "A"	DIM "B"
4120-FXXXXX01	1.50mm	2.00mm
4120-FXXXXX02	2.30mm	2.50mm
4120-FXXXXX03	3.00mm	



WITHOUT POST POST IN THE MIDDLE POST ON THE LEFT POST ON THE SIDE

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418