
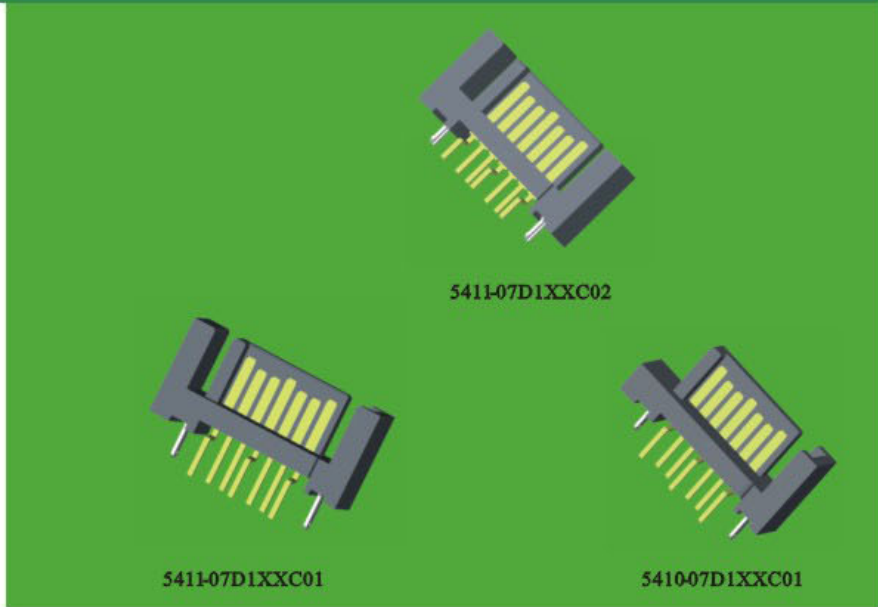


SATA 7P Male Connector

SPECIFICATIONS


Current Rating: 1.5AMP
 Contact Resistance: 30mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : 500V AC/Minute
 Operation Temperature: -55°C to +125°C
 Contact Material: Brass
 Contact plating: Au or Tin Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T+30%GF

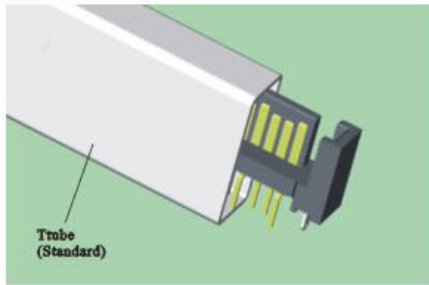

54XX-07 D1 XX C 0 X

10: One Arm
 11: Two Arm

CONTACT	PLATING
G0:1u" Gold	S0:1u" Gold/Tin
G1:3u" Gold	S1:3u" Gold/Tin
G2:5u" Gold	S2:5u" Gold/Tin
G3:10u" Gold	S3:10u" Gold/Tin
G4:15u" Gold	S4:15u" Gold/Tin
G5:30u" Gold	S5:30u" Gold/Tin
G6:20u" Gold	S6:20u" Gold/Tin
	SN:Tin

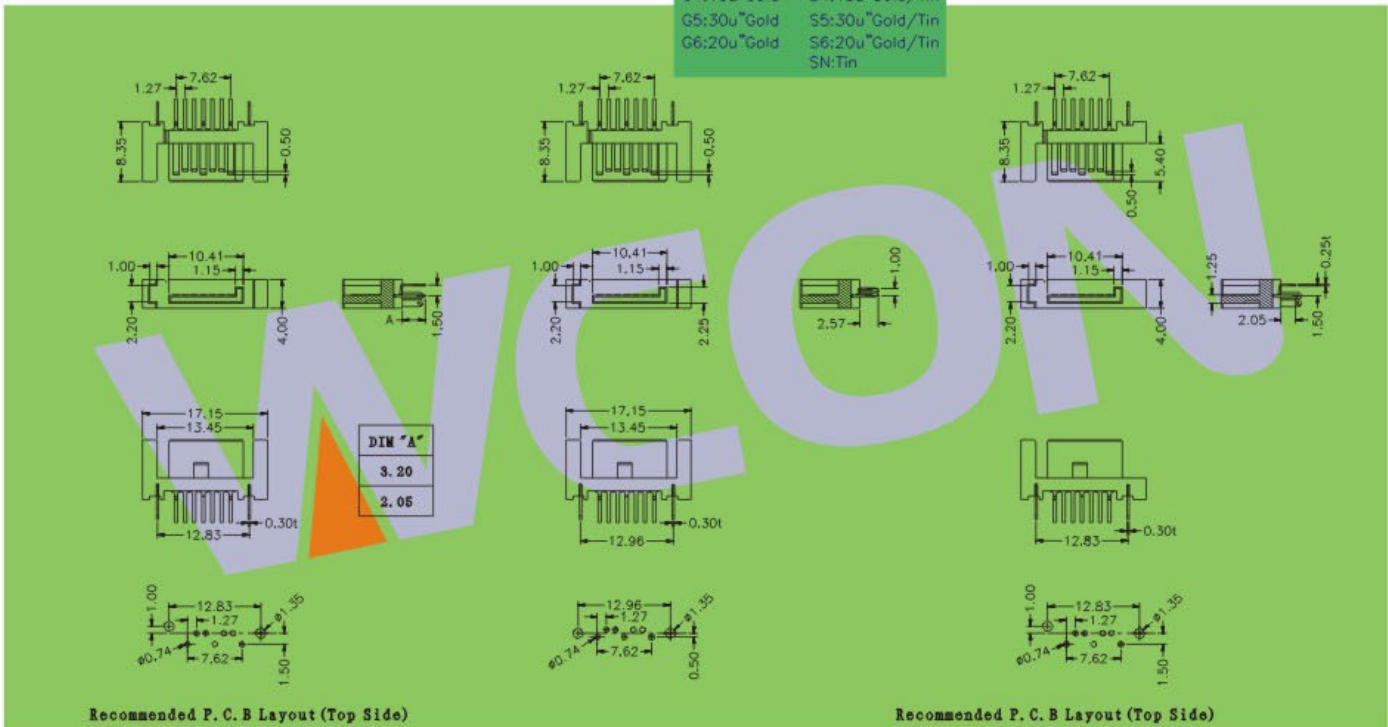

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418