


0.635mm Pitch Flat Cable

SPECIFICATIONS

UL&CSA GRADE:
 UL Style.....2678
 Rate Temperature.....-20°C T0105°C
 Rate Voltage.....Max 150V
 Flame Test.....vw-1

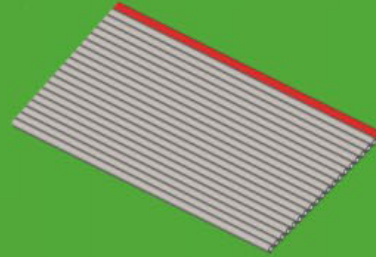

C9112-XXXXXX00X

C9112-

XX

XXX


XXX

NO.OF PINS
8~60P



Flat Cable Length

TYPE
001:Standard Flat Cable
002:Nonstandard Flat Cable

Standard Flat Cable



Nonstandard Single Flat Cable



DETAIL:S

Conductor AWG	Material Of Insulation	Insulation Of Thickness	Spark Test	Dielectric Strength (1 minute)	Conductor 20°C Resistance	Insulation Resistance	Impedance		Capacitance		Propagation Delay
							G-S-G	G-S	G-S-G	G-S	
Stranded 7/38 Tinned	PVC	Min 6mil	AC 1500V	AC 1500V	Max 376 Ω/KM	Min 1K Ω-M	72 Ω	102 Ω	98PF/M	64PF/M	5.2ns/M
Single 30AWG	PVC	Min 6mil	AC 1500V	AC 1500V	Max 361 Ω/KM	Min 1G Ω-M	77 Ω	106 Ω	92PF/M	58PF/M	5.0ns/M

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418