


1.00/1.27mm Pitch Flat Cable

SPECIFICATIONS




UL&CSA GRADE:
 UL Style.....2651
 Rate Temperature.....-20°C T0105°C
 Rate Voltage.....Max 300V
 Flame Test.....VW-1

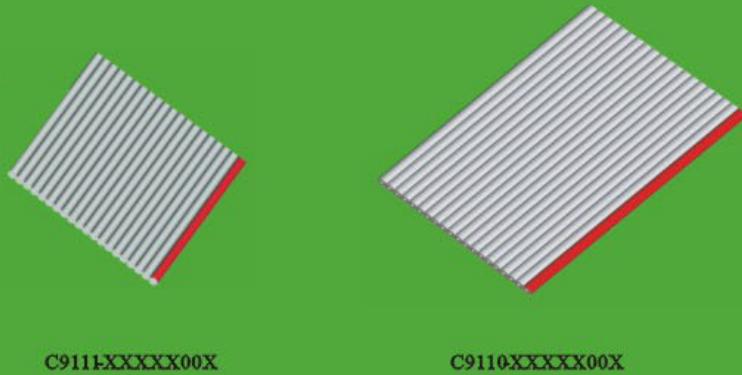


C911X- XX XXX XXX

PITCH: 1:1.00Pitch, 0:1.27Pitch
 NO.OF PINS: 8~60P
 Flat Cable Length
 TYPE: 001:0.12*7, 002:0.10*7

Standard Flat Cable




Standard Flat Cable



Nonstandard Flat Cable



Nonstandard Flat Cable



Conductor AWG	Material Of Insulation	Insulation Of Thickness	Spark Test	Dielectric Strength (1 minute)	Conductor 20°C Resistance	Insulation Resistance	Impedance	Capacity
28A WG	PVC	0.95mm	AC 2500V	AC 2000V	Max 237 Ω/KM	Min 100MΩ-M	100Ω	40PF/M

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418