


HSF

NOTES:
 Rated Current:1A
 Rated Voltage:50V AC/DC
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC/Minute
 Insulation Resistance:100MΩ min
 Operation Temperature: -25°C to +85°C
 Material:High Temperature
 Plastic UL94V-0

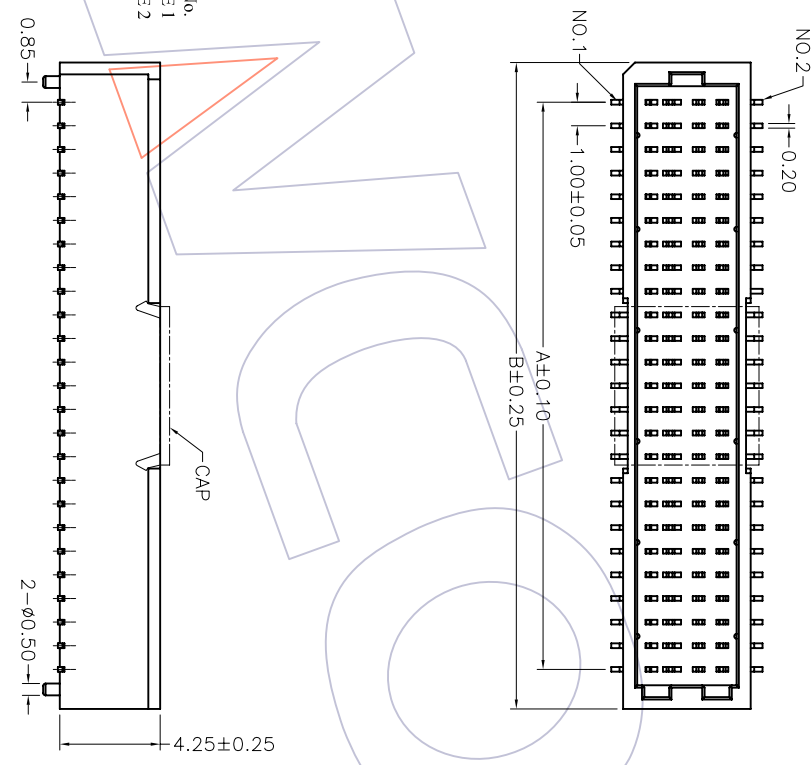

Ordering Information



WF1006 - WM XX X T X

No. of pins Color Packing Series No.
 10 20 E=Beige T=Tube 1=TYPE 1
 12 24 W=White P=Tube+CAP 2=TYPE 2
 14 30 B=Black R=Tube&Resist+CAP
 16 34 N=Brown
 18 40
 20 50

TYPE	PART NO.
TYPE 1	WF1006-WMXXXXT1
TYPE 2	WF1006-WMXXXXT2

Dimensional & Ordering Information

Circuit	Part No.	Dimension	
		A	B
10	WF1006-WM10XTX	4.00	7.30
12	WF1006-WM12XTX	5.00	8.30
14	WF1006-WM14XTX	6.00	9.30
16	WF1006-WM16XTX	7.00	10.30
18	WF1006-WM18XTX	8.00	11.30
20	WF1006-WM20XTX	9.00	12.30
24	WF1006-WM24XTX	11.00	14.30
30	WF1006-WM30XTX	14.00	17.30
34	WF1006-WM34XTX	16.00	19.30
40	WF1006-WM40XTX	19.00	22.30
50	WF1006-WM50XTX	24.00	27.30

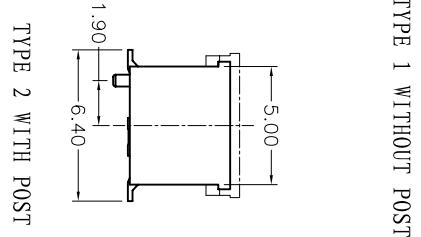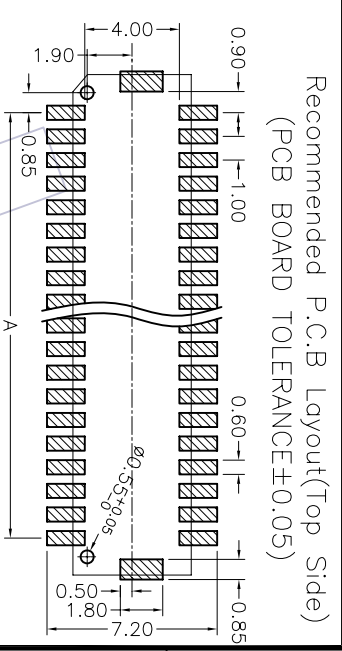

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO. LTD

OPERATION	DRAW	WEIXD	SCALE	PART NO.
X.X	DESIGN	08/07/25	1:1	
X.XX	CHECK		mm	
X.XXX	CHECK		A4	
Angle	CHECK		1/1	TITLE:
± 3'	APPROVE		PROJ.	Customer NO.
± 3'	APPROVE			

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A0	08/07/25	NEW		