



# HSF

NOTES:  
 Rated Current:1A  
 Rated Voltage:50V AC/DC  
 Contact Resistance:20mΩ max  
 Withstand Voltage:500V AC/Minute  
 Insulation Resistance:100MΩ min  
 Operation Temperature:-25°C to+85°C  
 Material:P.B.T UL94V-0

## Ordering Information

WF1006 - H XX X 01

No.of pins      Color      Packing  
 12PIN          E=Beige      0=PE Bag  
 16PIN          W=White  
 20PIN          B=Black  
 30PIN          N=Brown  
 40PIN  
 50PIN

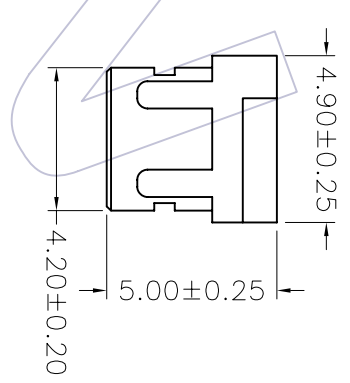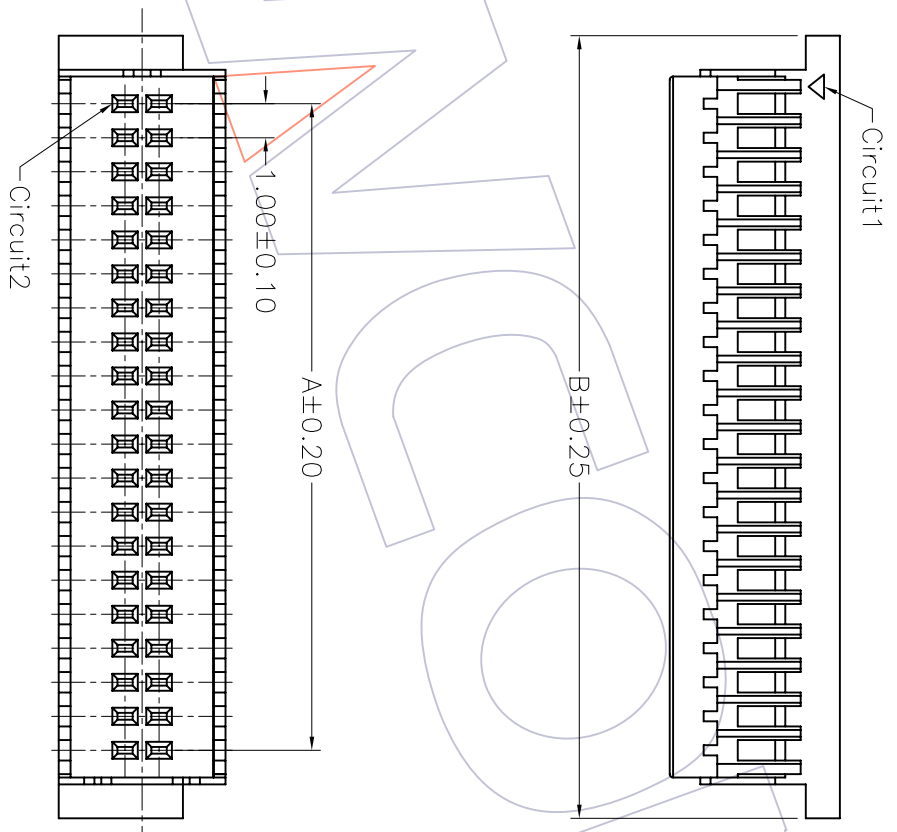

### Dimensional & Ordering Information

Circuit	Part No.	Dimension		Q'ty/bag
		A	B	
2x6P	WF1006-H12X01	5.00	9.00	1,000
2x8P	WF1006-H16X01	7.00	11.00	1,000
2x10P	WF1001-H20X01	9.00	13.00	1,000
2x15P	WF1001-H30X01	14.00	18.00	1,000
2x20P	WF1001-H40X01	19.00	23.00	1,000
2x25P	WF1001-H50X01	24.00	28.00	1,000

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW	WEIXD	08/07/25	SCALE		PART NO.	TITLE:	SEE TAB
					XXX	±0.25				UNIT	1:1			
A0	08/07/25	NEW			XXX	±0.13	DESIGN			mm	A4			
					X.XXX	0.08	CHECK				1/1		1.00 HOUSING	
					Angle	± 3'	APPROVE							
					DIM	TOL								

**WCON** 维峰五金电子有限公司  
 WAFE HARDWARE ELECTRONICS CO.,LTD