HSF

NOTES:
Rated Current:1.0AMP
Rated Voltage:100V AC/DC
Contact Resistance:20mΩ max
Withstand Voltage:250V AC/Minute
Insulation Resistance:100MΩ min
Operation Temperature:−25℃ to +85℃

Insulator Material:PA66 UL94V−0

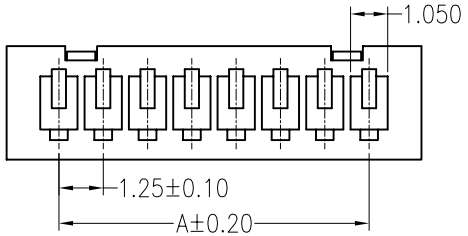

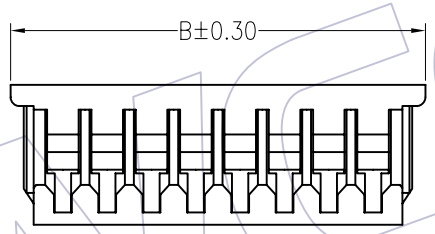



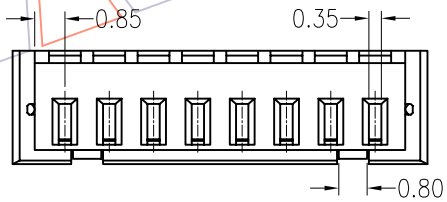

4P~20P



2P~3P

Ordering Information

WF 1251 - H XX X 0 1

XX	X
No.of pins 02pin~20pin	Color E=Beige W=White

Specification & Ordering Information:

Circuit	Part No.	Dimension A	Dimension B	Q'ty /Bag
02	WF1251−H02X01	1.25	4.20	1,000
03	WF1251−H03X01	2.50	5.45	1,000
04	WF1251−H04X01	3.75	6.70	1,000
05	WF1251−H05X01	5.00	7.95	1,000
06	WF1251−H06X01	6.25	9.20	1,000
07	WF1251−H07X01	7.50	10.45	1,000
08	WF1251−H08X01	8.75	11.70	1,000
09	WF1251−H09X01	10.00	12.95	1,000
10	WF1251−H10X01	11.25	14.20	1,000
11	WF1251−H11X01	12.50	15.45	1,000
12	WF1251−H12X01	13.75	16.70	1,000
13	WF1251−H13X01	15.00	17.95	1,000
14	WF1251−H14X01	16.25	19.20	1,000
15	WF1251−H15X01	17.50	20.45	1,000
16	WF1251−H16X01	18.75	21.70	1,000
17	WF1251−H17X01	20.00	22.95	1,000
18	WF1251−H18X01	21.25	24.20	1,000
19	WF1251−H19X01	22.50	25.45	1,000
20	WF1251−H20X01	23.75	26.70	1,000

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A0	08/07/19	NEW		

OPERATION		DRAW	William Chen	08.07.19
X.X	±0.25	DESIGN		
X.XX	±0.13			
X.XXX	±0.08	CHECK		
Angle	± 3°	APPROVE		
DIM	TOL			

SCALE	1:1
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WCON 维峰五金电子有限公司
WAFE HARDWARE ELECTRONICS CO.LTD

PART NO.	SEE TAB
TITLE:	MX1.25 WAFER HOUSING
Customer NO.	