

HSF

NOTES:


Rating Voltage:125V AC/DC
 Current Rating:1.0AMP
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:100MΩ min
 Operation Temperature:-25°C to +85°C

Contact Material:Brass
 Contact plating:Au or Sn Over Ni
 Insulator Material:High Temperature
 Plastic UL94V-0


Ordering Information

WF 1252 - WZ XX X X 1

No. of pins Color Packing
 02-10pin B=Black 0=PE Bag
 15pin E=Beige T=Tube
 20pin W=White R=Tap&Reel
 25pin
 30pin

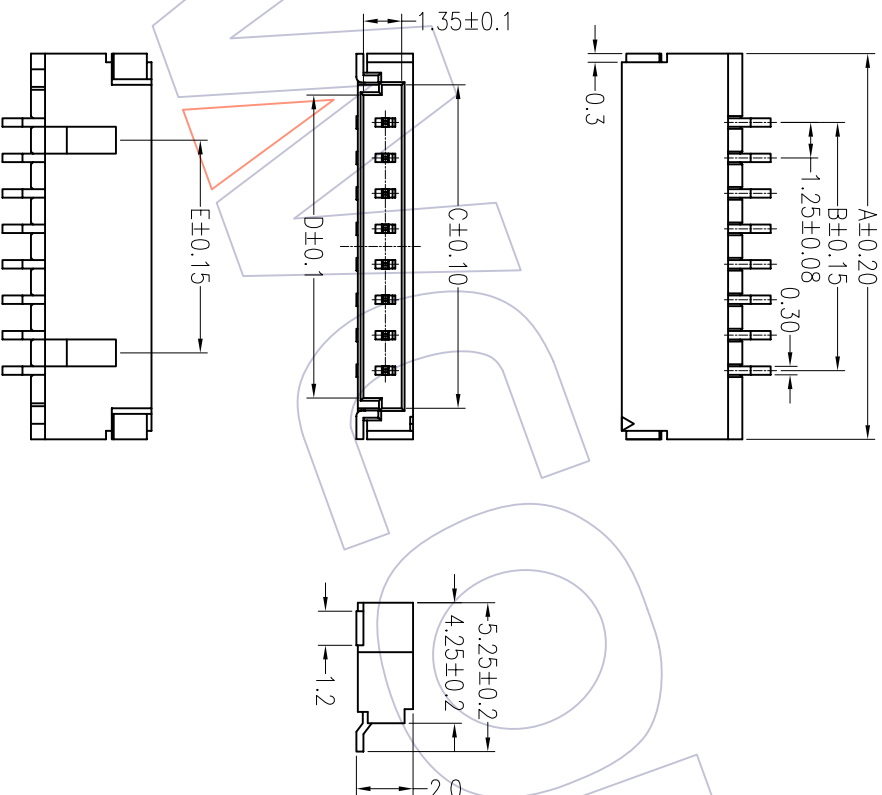

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE ± 0.05)

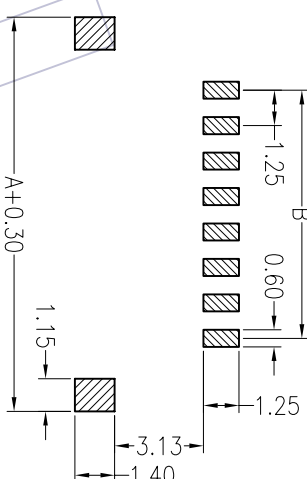

Specification & Ordering Information:

Circuit	Part No.	Dimension				
		A	B	C	D	E
02	WF1252-WZ02XX1	6.10	1.25	3.90	3.18	---
03	WF1252-WZ03XX1	7.35	2.50	5.15	4.43	---
04	WF1252-WZ04XX1	8.60	3.75	6.40	5.68	---
05	WF1252-WZ05XX1	9.85	5.00	7.65	6.93	---
06	WF1252-WZ06XX1	11.10	6.25	8.90	8.18	---
07	WF1252-WZ07XX1	12.35	7.50	10.15	9.43	---
08	WF1252-WZ08XX1	13.60	8.75	11.40	10.68	7.50
09	WF1252-WZ09XX1	14.85	10.00	12.65	11.93	8.75
10	WF1252-WZ10XX1	16.10	11.25	13.90	13.18	10.00
15	WF1252-WZ15XX1	22.35	17.50	20.15	19.43	16.25
20	WF1252-WZ20XX1	28.60	23.75	26.40	25.68	22.50
25	WF1252-WZ25XX1	34.85	30.00	32.65	31.93	28.75
30	WF1252-WZ30XX1	41.10	36.25	38.90	38.18	35.00

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO. LTD

PART NO. SBE TAB
 TITLE: 1.25 WAFER 90° SMT
 Customer NO.

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW	2012.08.04	08.08.04	SCALE	
					Angle	± 3'				UNIT	1:1
A0	08/08/04	NEW			X.XX	± 0.25	DESIGN			mm	A4
					X.XXX	± 0.13	CHECK			1/1	1/1