
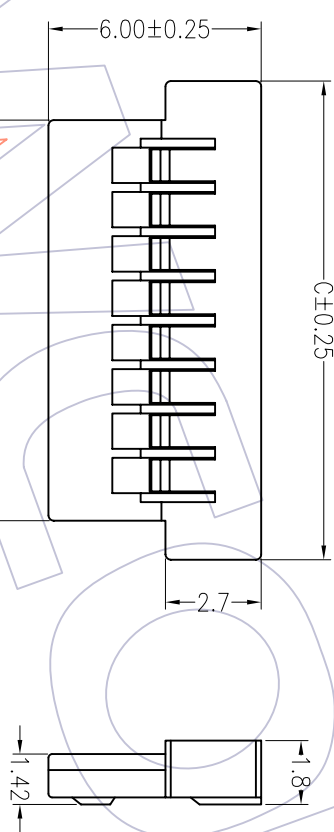


# HSF

**NOTES:**

Rated Current:1.0AMP  
 Rated Voltage:125V AC/DC  
 Contact Resistance:20mΩ max  
 Withstand Voltage:500V AC/Minute  
 Insulation Resistance:100MΩ min  
 Operation Temperature:-25°C to +85°C  
 Insulator Material:PBT or PA66+GF UL94V-0



## Ordering Information

WF 1252 - H XX B 0 1

No. of pins  
 2~10pin  
 15pin  
 20pin  
 25pin  
 30pin

Color  
 E=Beige  
 V=White  
 B=Black

Specification & Ordering Information:

Circuit	Part No.	Dimension					Q'ty /Bag
		A	B	C	D	E	
02	WF1252-H02B01	1.25	3.80	6.00	---	2.63	1,000
03	WF1252-H03B01	2.50	5.05	7.25	---	3.88	1,000
04	WF1252-H04B01	3.75	6.30	8.50	---	5.13	1,000
05	WF1252-H05B01	5.00	7.55	9.75	---	6.38	1,000
06	WF1252-H06B01	6.25	8.80	11.00	---	7.63	1,000
07	WF1252-H07B01	7.50	10.05	12.25	---	8.88	1,000
08	WF1252-H08B01	8.75	11.30	13.50	7.50	10.13	1,000
09	WF1252-H09B01	10.00	12.55	14.75	8.75	11.38	1,000
10	WF1252-H10B01	11.25	13.80	16.00	10.00	12.63	1,000
15	WF1252-H15B01	17.50	20.05	22.25	16.25	18.88	1,000
20	WF1252-H20B01	23.75	26.30	28.50	22.50	25.13	1,000
25	WF1252-H25B01	30.00	32.55	34.75	28.75	31.38	1,000
30	WF1252-H30B01	36.25	38.80	41.00	35.00	37.63	1,000

**WCON** 维峰五金电子有限公司  
 WAFER HARDWARE ELECTRONICS CO. LTD

OPERATION	DRAW	Millium Class	08.08.04
X.X	DESIGN		
X.XX	CHECK		
X.XXX	APPROVE		
Angle	± 3'		
DIM	TOL		

SCALE	UNIT	SIZE	SHEET	PROJ.
1:1	mm	A4	1/1	Customer NO.
PART NO.				
TITLE:				
SEE TAB				
1.25mm HOUSING				

REV	DATE	MODIFICATION	DESCRIPTION	CHANGE	APPROVE
A0	08/08/04	NEW			