

HSF

NOTES:


Rating Voltage:250V AC/DC
 Current Rating:1.0AMP
 Contact Resistance:10mΩ max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:100MΩ min
 Operation Temperature:-25°C to +85°C

Contact Material:Brass
 Contact plating:Au or Sn Over Ni
 Insulator Material:LCP UL94V-0


Ordering Information

WF 1253 - WM XX X X 1

No.of pins Color Packing
 10=10pin B=Beige T=Tube
 20=20pin W=White P=Tube+CAP
 30=30pin R=Tube&Reel+CAP
 40=40pin

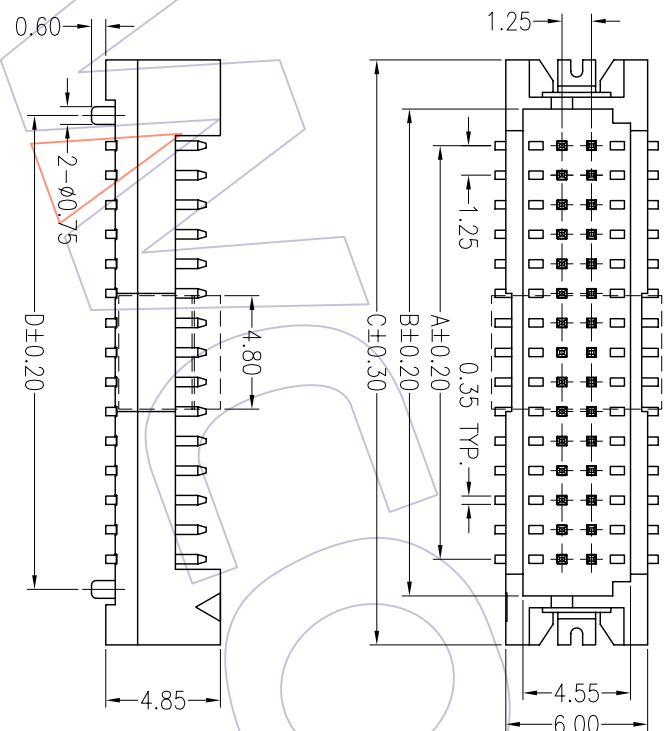

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.10)

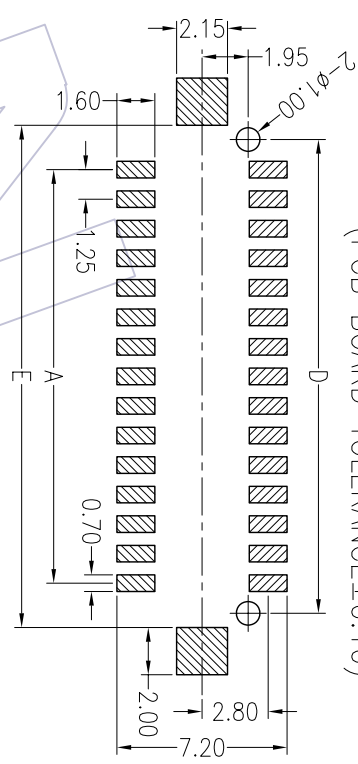

Specification & Ordering Information:

Circuit	Part No.	Dimension				
		A	B	C	D	E
10	WF1253-WM10XT1	5.00	8.10	12.25	7.55	8.75
20	WF1253-WM20XT1	11.25	14.35	18.50	13.80	15.00
30	WF1253-WM30XT1	17.50	20.60	24.75	20.05	21.25
40	WF1253-WM40XT1	23.75	26.85	31.00	26.30	27.50

WCON 维峰五金电子有限公司
 WAFE HARDWARE ELECTRONICS CO. LTD

PART NO. SBE TAB
 TITLE: 1.25 WAFER SMT
 Customer NO.

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Scale
A0	08/07/29	NEW			X.X ±0.25 X.XX ±0.15 X.XXX ±0.05	DESIGN CHECK	1:1 mm A4
					Angle ± 3'	APPROVE	1/1

OPERATION	DRAW	Scale	UNIT	PART NO.	TITLE:
X.X ±0.25	William Chan	1:1	mm	SBE TAB	1.25 WAFER SMT
X.XX ±0.15	DESIGN				
X.XXX ±0.05	CHECK				
Angle ± 3'	APPROVE				