
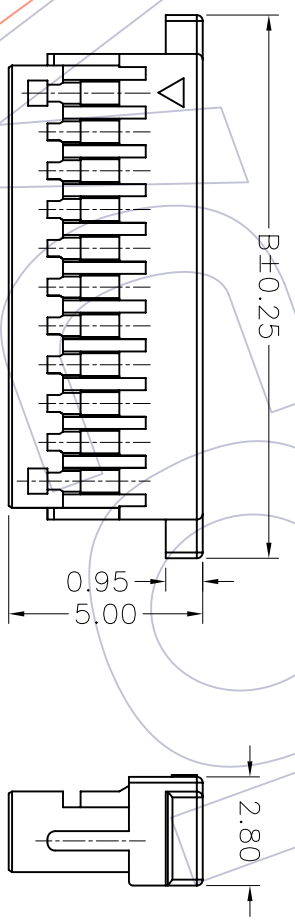


HSF


NOTES:
 Rated Current:1A
 Rated Voltage:50V AC/DC
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC/Minute
 Insulation Resistance:100MΩ min
 Operation Temperature:-25℃ to+85℃
 Material:P.B.T UL94V-0

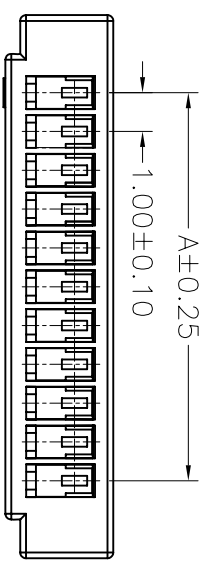

Ordering Information

WF1001 - H XX X 0 1

No.of pins
 02pin-20pin
 Color
 E=Beige
 W=White
 B=Black
 N=Brown
 Packing
 0=PE Bag



Dimensional & Ordering Information

Circuit	Part No.	Dimension		Q'Ty/ bag
		A	B	
02	WF1001-H02X01	1.00	5.00	1,000
03	WF1001-H03X01	2.00	6.00	1,000
04	WF1001-H04X01	3.00	7.00	1,000
05	WF1001-H05X01	4.00	8.00	1,000
06	WF1001-H06X01	5.00	9.00	1,000
07	WF1001-H07X01	6.00	10.00	1,000
08	WF1001-H08X01	7.00	11.00	1,000
09	WF1001-H09X01	8.00	12.00	1,000
10	WF1001-H10X01	9.00	13.00	1,000
11	WF1001-H11X01	10.00	14.00	1,000
12	WF1001-H12X01	11.00	15.00	1,000
13	WF1001-H13X01	12.00	16.00	1,000
14	WF1001-H14X01	13.00	17.00	1,000
15	WF1001-H15X01	14.00	18.00	1,000
16	WF1001-H16X01	15.00	19.00	1,000
17	WF1001-H17X01	16.00	20.00	1,000
18	WF1001-H18X01	17.00	21.00	1,000
19	WF1001-H19X01	18.00	22.00	1,000
20	WF1001-H20X01	19.00	23.00	1,000

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO. LTD

PART NO. SBE TAB
 TITLE: JST 1.00 HOUSING

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW	WEIXD	08/06/30	SCALE		PART NO.
					Angle	Dim				UNIT	SIZE	
A0	08/06/30	NEW			± 3'	± 0.13	DESIGN			mm	A4	
						0.08	CHECK				1/1	
							APPROVE					Customer NO.