





UL&CSA GRADE:
 UL Style.....2678
 Rate Temperature.....-20°C TO 105°C
 Rate Voltage.....Max 150V
 Flame Test.....VM-1

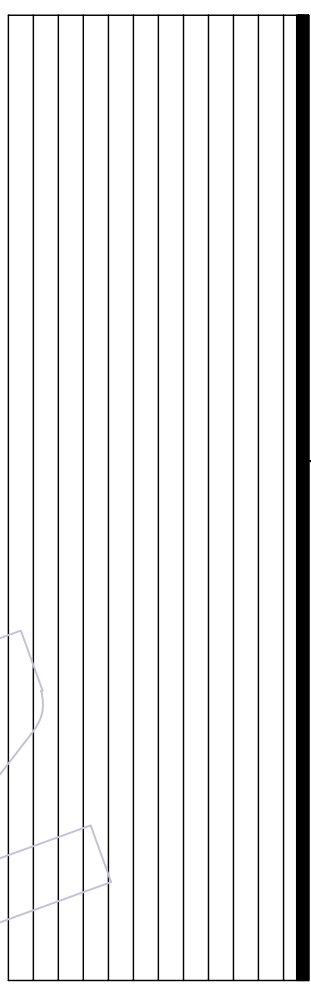

Ordering Information

C9112 - XX XXX XXX

No. of Pins 08-60P
 Flat Cable Length
 Type 001=Standard 002=Nonstandard

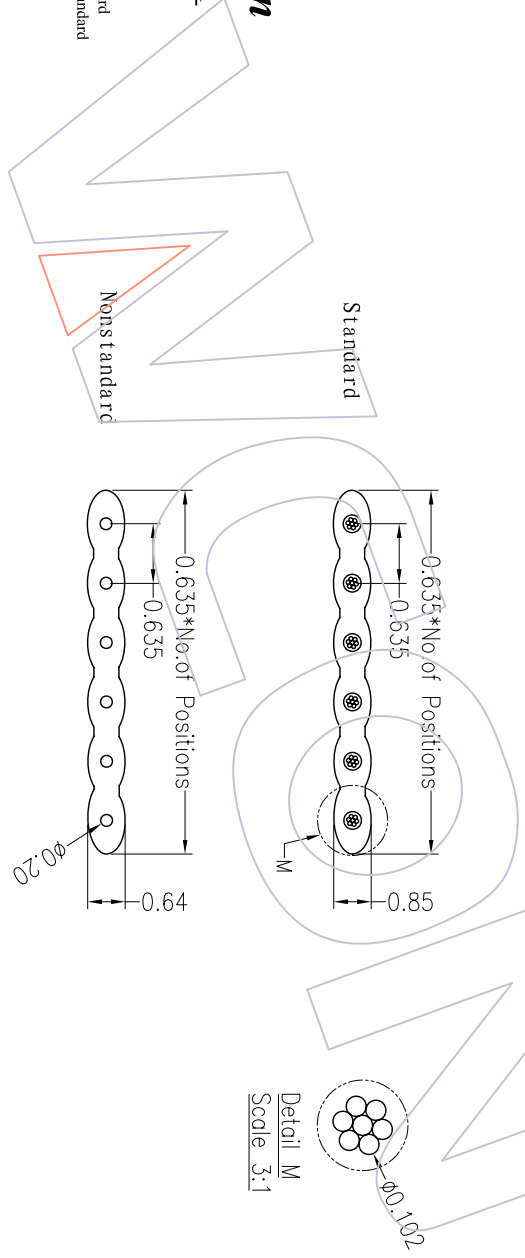

Conductor AWG	Material of Insulation	Insulation of Thickness	Spark Test	Dielectric Resistance (1 minute)	Conductor Resistance 20° C	Insulation Resistance	Impedance		Capacitance		Propagation Delay
							G-S-G	G-S	G-S-G	G-S	
Stranded 7/38 Tinned	PVC	Min 6mil	AC 1500V	AC 1500V	Max 376Ω/KM	Min 1KΩ-M	72Ω	102Ω	98PF/M	64PF/M	5.2ns/M
Single 30AWG	PVC	Min 6mil	AC 1500V	AC 1500V	Max 361Ω/KM	Min 16Ω-M	77Ω	106Ω	92PF/M	58PF/M	5.0ns/M

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW		SCALE		PART NO.	TITLE:
					X.X	±	DESIGN	Millimeter Class	09/03/18	UNIT		
A0	09/03/18	NEW			X.X	±0.40			1:1	A4	C9112-XXXXXXXX	0.635mm Pitch Flat Cable
					X.XX	±0.25	CHECK					
					X.XXX	±0.15	APPROVE					
					Angle	± 3'						
					DIM	TOL						

WCON 维峰五金电子有限公司
 WAFE HARDWARE ELECTRONICS CO. LTD

1 2 3 4 5 6 7 8 9 10