




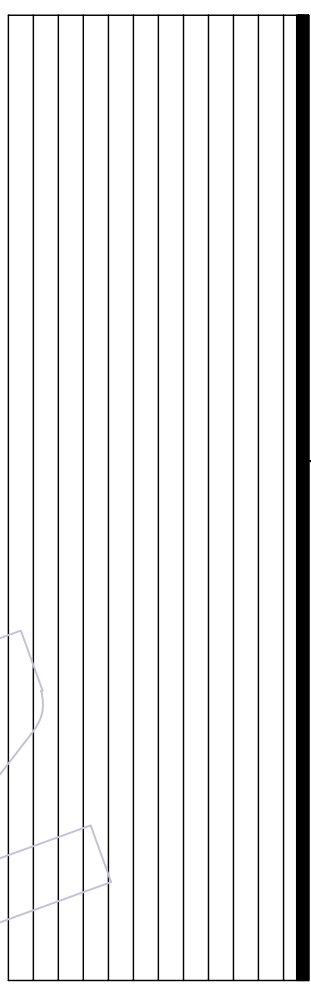

UL&CSA GRADE:
 UL Style.....2651
 Rate Temperature.....-20°C TO 105°C
 Rate Voltage.....Max 300V
 Flame Test.....VW-1

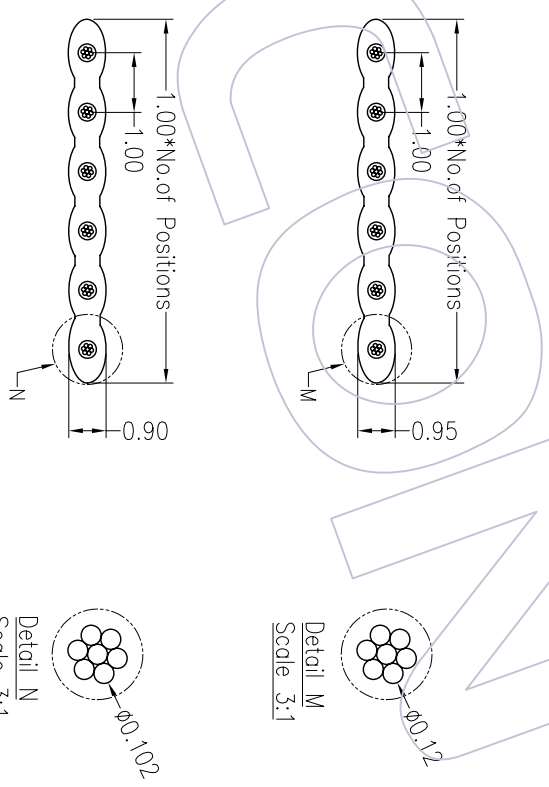

Ordering Information

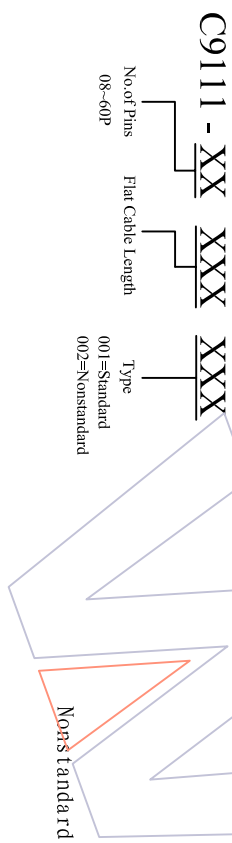

Conductor AWG	Material of Insulation	Insulation of Thickness	Spark Test	Dielectric Resistance (1 minute)	Conductor Resistance 20°C	Insulation Resistance	Impedance	Capacity
28AWG	PVC	0.95/0.90mm	AC 2500V	AC 2000V	Max 237 Ω/KM	Min 100MΩ-M	100 Ω	40PF/M

OPERATION	X.X	±0.40	DRAW	William Chen	09/03/18	SCALE 1:1	UNIT mm	PART NO.	TITLE:	Customer NO.
	X.XX	±0.25	DESIGN							
ANGLE	X.XXX	±0.15	CHECK			SIZE A4	SHEET 1/1	C9111-XXXXXXXXXX		
	Angle	± 3'	APPROVE			PROJ.		1.00mm Pitch Flat Cable		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE						

WCON 维峰五金电子有限公司
 WAFE HARDWARE ELECTRONICS CO. LTD