




UL&CSA GRADE:  
 UL Style.....2651  
 Rate Temperature.....-20°C TO 105°C  
 Rate Voltage.....Max 300V  
 Flame Test.....VW-1

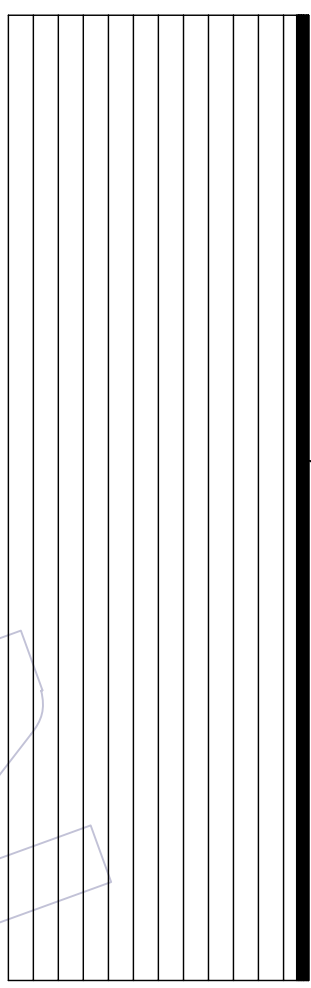



# Ordering Information

C9110 - XX XXX XXX

No. of Pins  
08-60P

Flat Cable Length

Type  
001=Standard  
002=Nonstandard

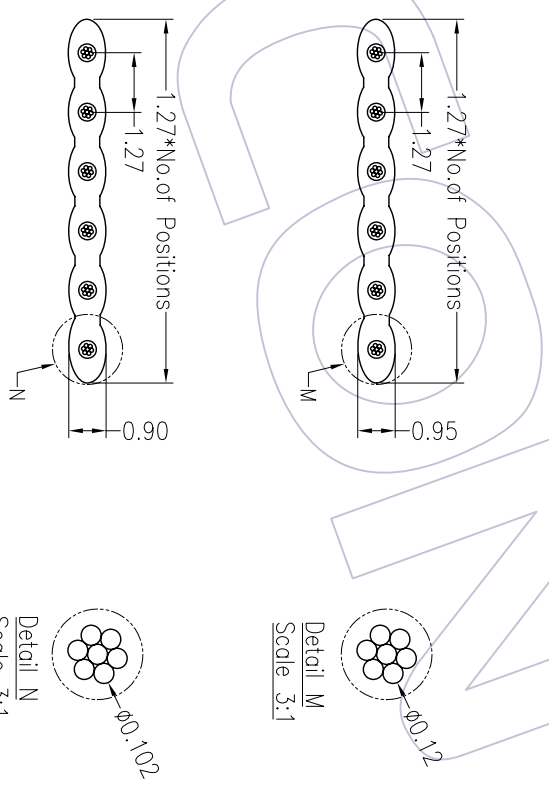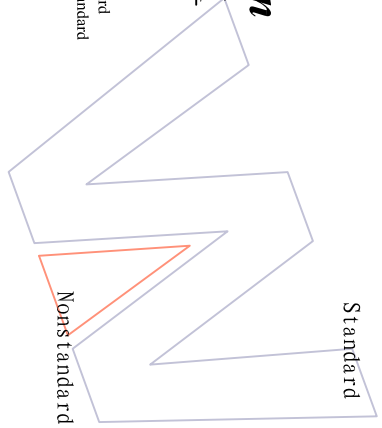

Conductor AWG	Material of Insulation	Insulation of Thickness	Spark Test	Dielectric Resistance (1 minute)	Conductor Resistance 20°C	Insulation Resistance	Impedance	Capacity
28AWG	PVC	0.95/0.90mm	AC 2500V	AC 2000V	Max 237 Ω/KM	Min 100MΩ-M	100 Ω	40PF/M

OPERATION	X.X	±0.40	DRAW	William Chen	09/03/18	SCALE 1:1	UNIT mm	PART NO.	C9110-XXXXXXXX
	X.XX	±0.25							
ANGLE	X.XXX	±0.15	CHECK			SIZE A4	SHEET 1/1	TITLE:	1.27mm Pitch Flat Cable
	Angle	± 3'							
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROU.	Customer NO.	
A0	09/03/18	NEW							

**WCON** 维峰五金电子有限公司  
 WAFE HARDWARE ELECTRONICS CO. LTD