



NOTES:




Current Rating:3.0AMP  
 Contact Resistance:30mΩ max  
 Withstand Voltage:1000V AC/Minute  
 Insulation Resistance:1000MΩ min  
 Operation Temperature:-55℃ to +105℃  
 Contact Material:Brass  
 Contact plating:Au or Sn Over Ni  
 Insulator Material:PBT+30%G.F UL94V-0

# Ordering Information

3410-2 XX X FI XX N A 1

No. of Pins per Row with Contacts  
 16pin B=a+h  
 32pin D=a

Contact Plating Packing  
 G0=Gold Flash A=Tray  
 G1=3u"Gold T=Tube  
 G2=5u"Gold  
 G3=10u"Gold  
 G4=15u"Gold  
 G5=30u"Gold  
 S0=Gold Flash/Tin  
 S1=3u"Gold/Tin  
 S2=5u"Gold/Tin  
 S3=10u"Gold/Tin  
 S4=15u"Gold/Tin  
 S5=30u"Gold/Tin  
 SN=Tin

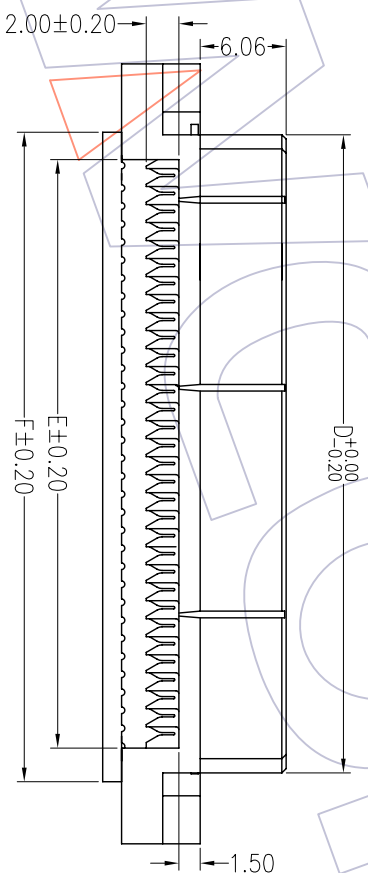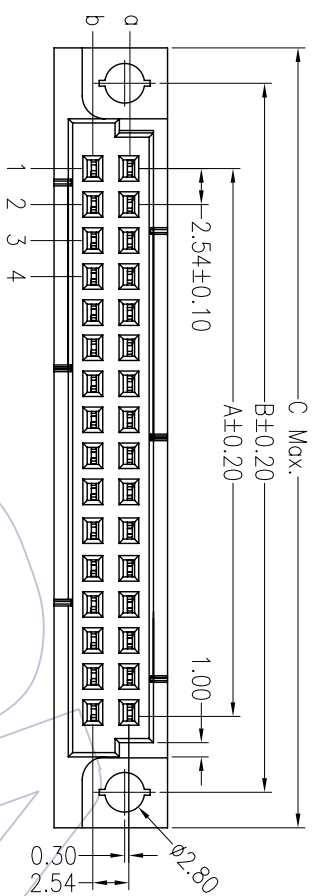

No. of Pins	A	B	C	D	E	F	PART NO.
2X16P	38.10	50.00	55.00	44.40	40.86	45.00	3410-216FIXXNA1
2X32P	78.74	90.00	95.00	85.00	81.50	85.80	3410-232FIXXNA1

Pitch	Rows/Positions With Contacts	PART NO.
2.54	a b	3410-2XXBFIXXNA1
0 -	0 -	3410-2XXDFIXXNA1

**WCON** 维峰五金电子有限公司  
 WAFE HARDWARE ELECTRONICS CO. LTD

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	DESIGN	CHECK	SCALE	PART NO.	TITLE:
A0	09/03/04	NEW			±0.40 ±0.25 ±0.15	Millium Class			1:1 mm A4		DIN41612 FEMALE DUAL ROW IDC TYPE

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	DESIGN	CHECK	SCALE	PART NO.	TITLE:
					±0.40 ±0.25 ±0.15	Millium Class			1:1 mm A4		DIN41612 FEMALE DUAL ROW IDC TYPE