



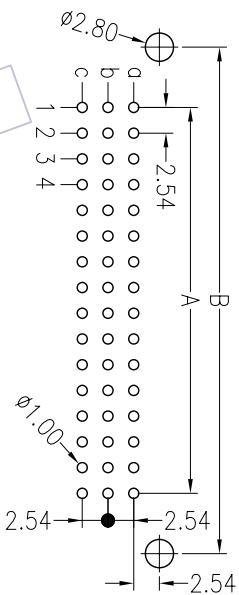

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

NOTES:



- Current Rating:3.0AMP
- Contact Resistance:30mΩ max
- Withstand Voltage:1000V AC/Minute
- Insulation Resistance:1000MΩ min
- Operation Temperature:-55℃ to +105℃
- Contact Material:Phosphor Bronze
- Contact plating:Au or Sn Over Ni
- Insulator Material:PBT+30%G.F UL94V-0

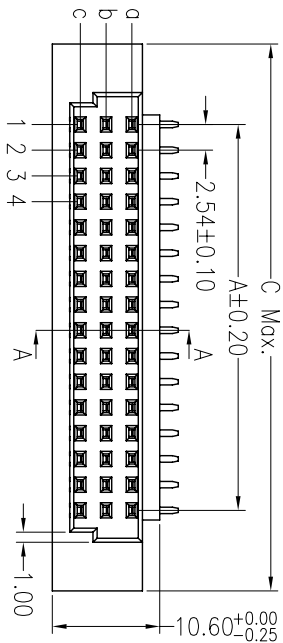

Ordering Information

3410-3 XX X FR XX N A 1

- No. of Pins per Row with Contacts
- 16pin A=+b+c
- 32pin B=a+b C=a+c D=a
- E=a+b+c
- F=a+b+c
- G=a+b+c
- H=a+b+c
- I=a+b+c
- J=a+b+c
- K=a+b+c
- L=a+b+c
- M=a+b+c
- N=a+b+c
- O=a+b+c
- P=a+b+c
- Q=a+b+c
- R=a+b+c
- S=a+b+c
- T=a+b+c
- U=a+b+c
- V=a+b+c
- W=a+b+c
- X=a+b+c
- Y=a+b+c
- Z=a+b+c

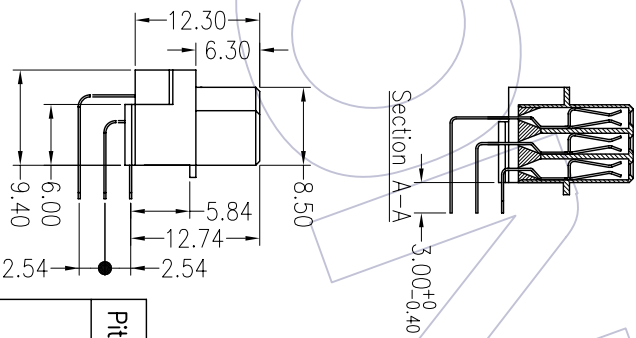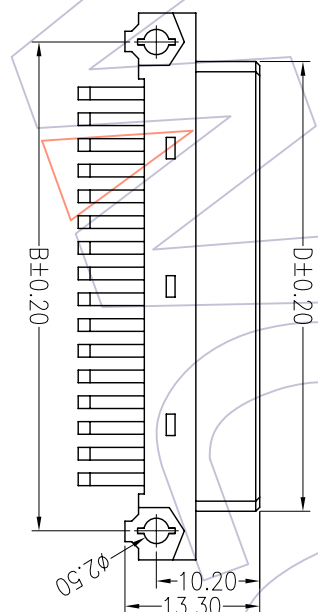

No. of Pins	A	B	C	D	PART NO.
3X16P	38.10	48.26	54.00	44.40	3410-316XFRXXNA1
3X32P	78.74	88.26	90.00	84.40	3410-332XFRXXNA1

Pitch	Rows/Positions With Contacts	PART NO.
2.54	a b c	3410-3XXAFRXXNA1
	a b -	3410-3XXBFRXXNA1
5.08	a - c	3410-3XXCFRXXNA1
	a - -	3410-3XXDFRXXNA1
5.08	a b c	3410-3XXEFRXXNA1
	a - c	3410-3XXFRXXNA1

WCON 维峰五金电子有限公司
WAVE HARDWARE ELECTRONICS CO. LTD

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	DESIGN	CHECK	APPROVE	SCALE	UNIT	PART NO.	TITLE:	DIV	SEE TABLE
A0	09/03/04	NEW			±0.40					1:1	mm		DIV41612 FEMALE THREE ROW 90° DIP(R-TYPE)		