

HSF


NOTES:

- Rated Current:3.0AMP
- Contact Resistance:30mΩ max
- Withstand Voltage:500V AC/DC
- Insulation Resistance:1000MΩ min
- Operation Temperature:-40℃ to +85℃
- Contact Material:Brass
- Contact Plating:Au or Sn Over Ni
- Shell Material: Zinc Alloy&Steel
- Shell plating: Ni or Sn over Fe
- Insulator Material:Polyester(UL94V-0)

Ordering Information

6230 - 23 M XX X 0 1

- No.of Pins 23: 18+5
- Contact Plating G0=Gold Flash G1=3u"Gold G2=5u"Gold G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S1=3u"Gold/Tin S2=5u"Gold/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin
- Color B=Black W=White G=Grey

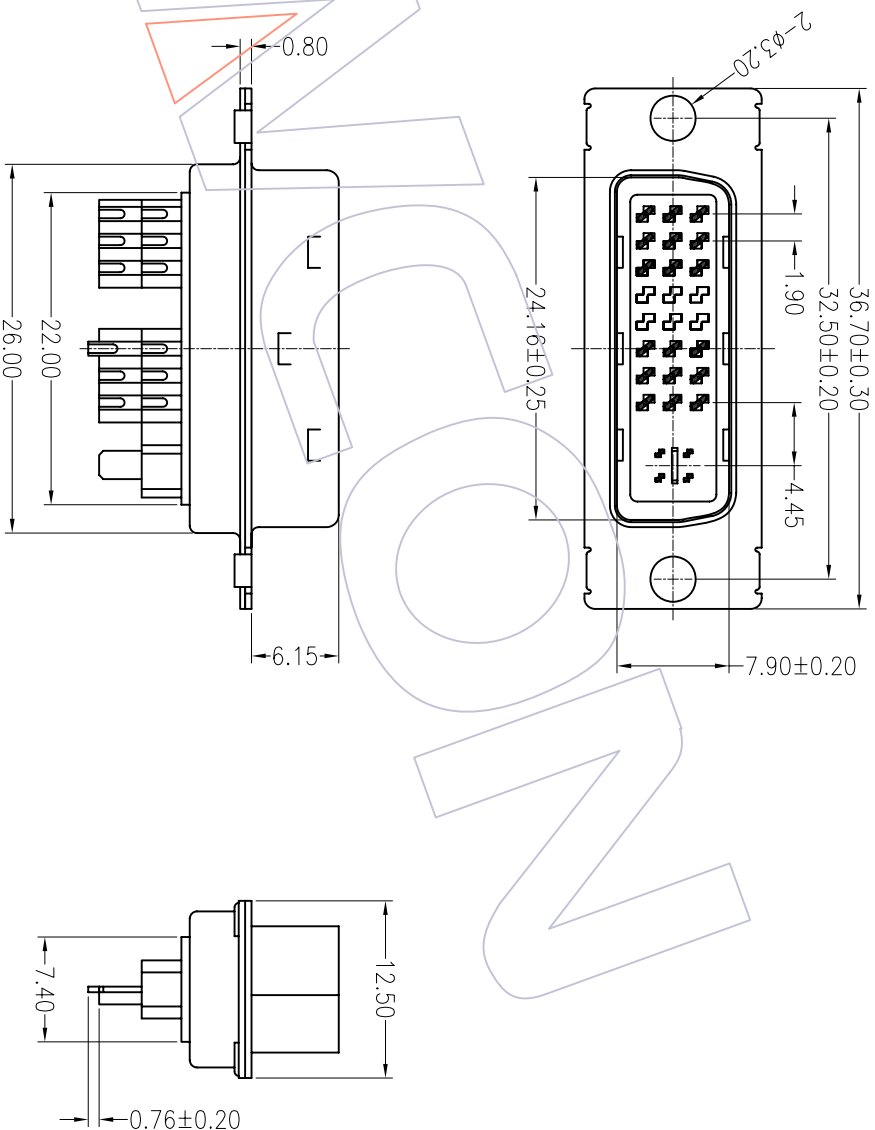

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW	SCALE	PART NO.
					Angle	± 3'			
A0	09/03/23	NEW			X.X	±0.40	DESIGN	1:1	6230-23MXX01
					X.XX	±0.25	CHECK	A4	DVI MALE 18+5 SOLDER TYPE
					X.XXX	±0.15		1/1	
					DIM	TOL	APPROVE	PROJ.	Customer NO.

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO.,LTD