

HSF




NOTES:

- Rated Current:1.5AMP
- Contact Resistance:30mΩ max
- Withstand Voltage:500V AC/DC
- Insulation Resistance:1000MΩ min
- Operation Temperature:-20℃ to +80℃
- Contact Material:Brass
- Contact Plating:Au or Sn Over Ni
- Shell :SPCC Ni-Plating
- Insulator Material:High Temperature Plastic(UL94V-0)


Ordering Information

6231 - 29 F XX X 0 1

- No. of Pins 29: 24+5
- Contact Plating G0=Gold Flash G1=3u"Gold G2=5u"Gold G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S1=3u"Gold/Tin S2=5u"Gold/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin
- Color B=Black W=White G=Grey

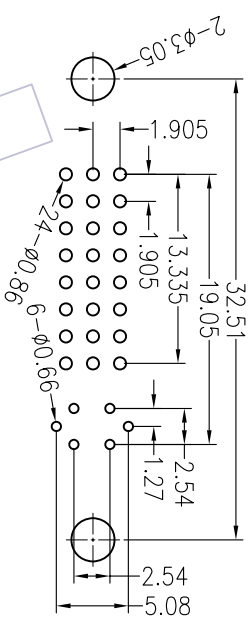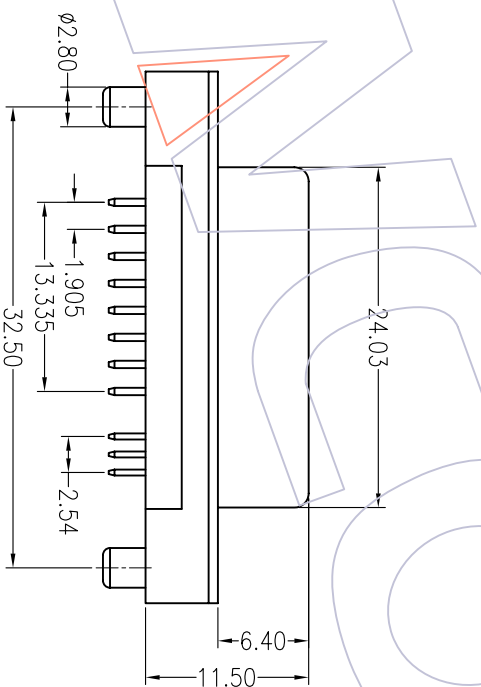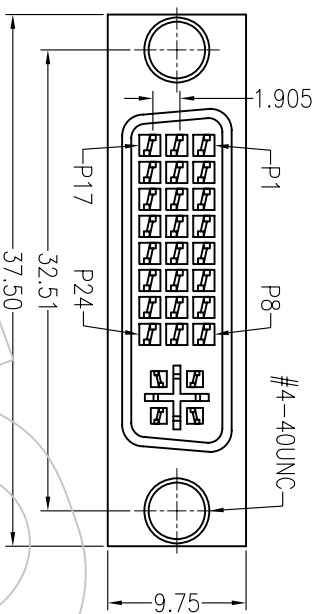

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)



REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW	SCALE	PART NO.
					Angle	± 3'			
A0	09/03/02	NEW			X.X	±0.40	Millium Clear	1:1	6231-29FXXX01
					X.XX	±0.25		A4	WAVE HARDWARE ELECTRONICS CO. LTD
					X.XXX	±0.15		1/1	DVI FEMALE 24+5 180° DIP
					DIM	TOL	APPROVE	PROU.	Customer NO.

WCON 维峰五金电子有限公司
WAVE HARDWARE ELECTRONICS CO. LTD