HSF

NOTES:
Rated Current:1.5AMP
Contact Resistance:30mΩ max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ min
Operation Temperature:−20℃ to +80℃

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Shell :SPCC Ni−Plating
Insulator Material:High Temperature Plastic(UL94V−0)

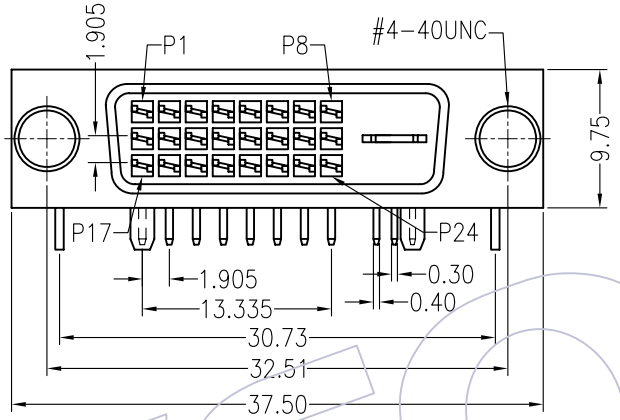

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

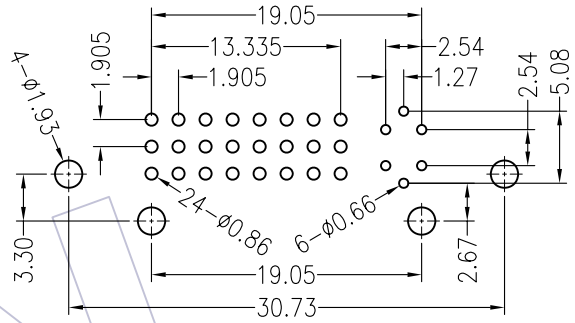

Ordering Information

6232 - 25 F XX X 01

No.of Pins	Contact Plating	Color
25: 24+1	G0=Gold Flash	B=Black
	G1=3u"Gold	W=White
	G2=5u"Gold	G=Grey
	G3=10u"Gold	
	G4=15u"Gold	
	G5=30u"Gold	
	S0=Gold Flash/Tin	
	S1=3u"Gold/Tin	
	S2=5u"Gold/Tin	
	S3=10u"Gold/Tin	
	S4=15u"Gold/Tin	
	S5=30u"Gold/Tin	
	SN=Tin	

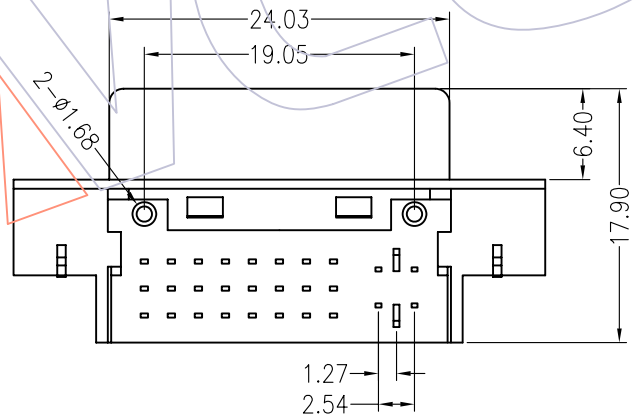

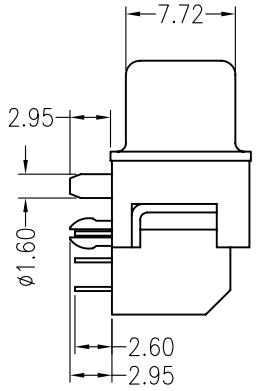

WCON

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A0	09/03/02	NEW	———	———

OPERATION				
X.X	±0.40	DRAW	William Chen	09.03.02
X.XX	±0.25	DESIGN		
X.XXX	±0.15	CHECK		
Angle	± 3°	APPROVE		
DIM	TOL			

SCALE	1:1
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WCON 维峰五金电子有限公司
WAFE HARDWARE ELECTRONICS CO.LTD

PART NO.	6232−25FXXX01
TITLE:	DVI FEMALE 24+1 90° DIP
Customer NO.	