HSF

NOTES:
Rated Current:3.0AMP
Contact Resistance:20mΩ max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ min
Operation Temperature:−40℃ to +105℃

Contact Material:Phosphor Bronze
Contact Plating:Au or Sn Over Ni
Insulator Material:PA6T+30%G.F(UL94V−0)

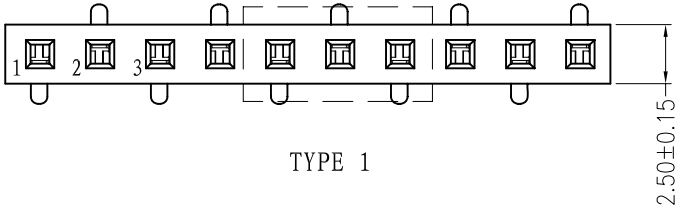

TYPE 1

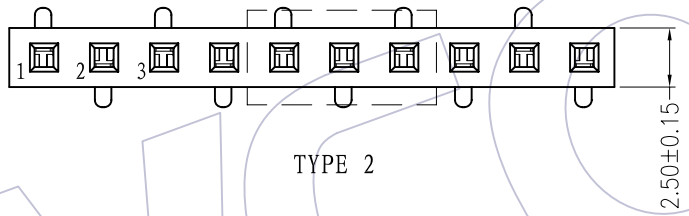

TYPE 2

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

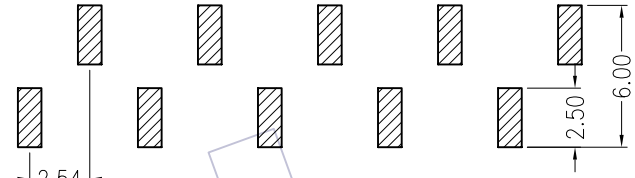

TYPE 1

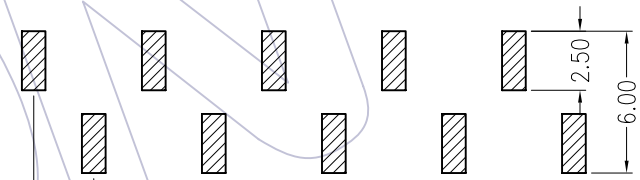

TYPE 2

Ordering Information

2195 - 1 XX M XX X U N X X

- No.of Pins Per: 02~40P
- Contact Plating: G0=Gold Flash, G1=3u"Gold, G2=5u"Gold, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold, S0=Gold Flash/Tin, S1=3u"Gold/Tin, S2=5u"Gold/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, SN=Tin
- Insulator: C=PA6T, D=LCP
- Packing: T=Tube, P=Tube+CAP, R=Tape&Reel+CAP
- Packing: 1=Type 1, 2=Type 2

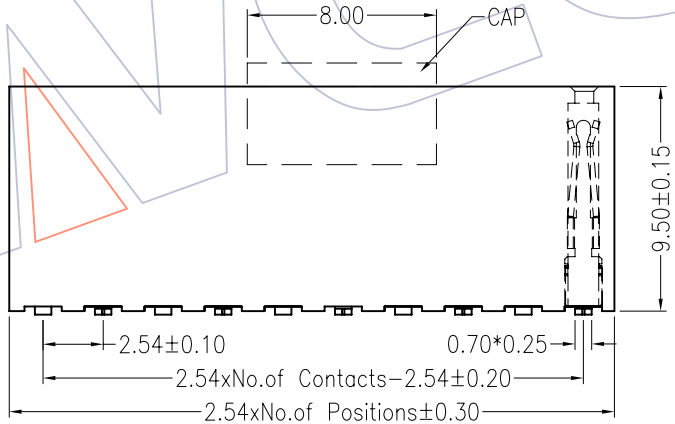

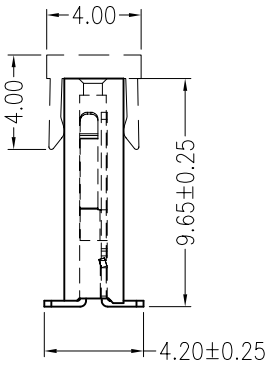

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A0	09/02/13	NEW	———	———

OPERATION				
X.X	±0.40	DRAW	WEIXD	09.02.13
X.XX	±0.25	DESIGN		
X.XXX	±0.15	CHECK		
Angle	± 3°	APPROVE		
DIM	TOL			

SCALE	1:1
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WCON 维峰五金电子有限公司
WAFE HARDWARE ELECTRONICS CO.LTD

PART NO.	2195-2XXMXXXUNXX
TITLE:	FH2.54 SINGLE ROW SMT H=9.50
Customer NO.	