


HSF

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

NOTES:

Rated Current:3.0AMP
Contact Resistance:20mΩ max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ min
Operation Temperature:-40°C to +105°C


Contact Material:Phosphor Bronze
Contact Plating:Au or Sn Over Ni
Insulator Material:PA6T/PBT+30%G.F(UL94V-0)



Ordering Information

2195 - 2 XX S XX X UN X 1

- No.of Pins Per 02-40P
- Contact Plating
G0=Gold Flash
G1=30u"Gold
G2=5u"Gold
G3=10u"Gold
G4=15u"Gold
G5=30u"Gold
S0=Gold Flash/Tin
S1=3u"Gold/Tin
S2=5u"Gold/Tin
S3=10u"Gold/Tin
S4=15u"Gold/Tin
S5=30u"Gold/Tin
SN=Tin
- Insulator
C=PA6T
A=PBT
- Packing
A=Tray
T=Tube

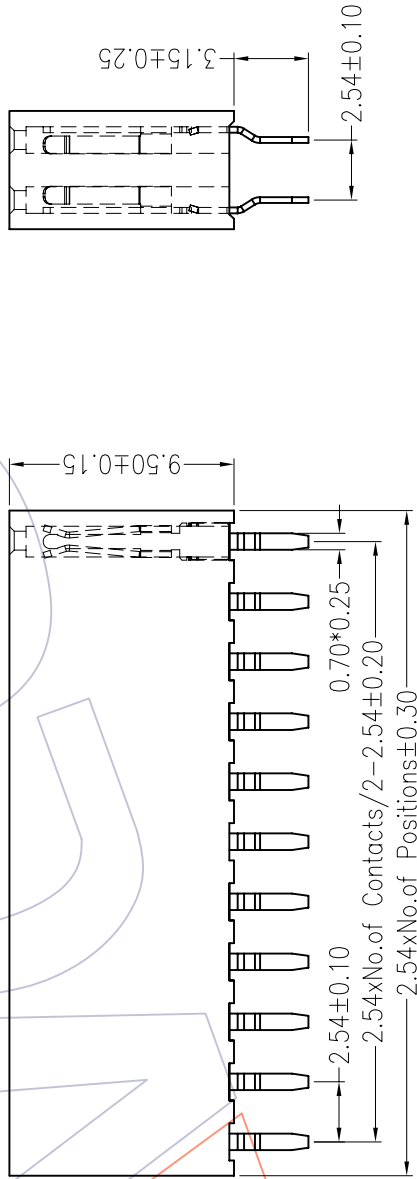

								09.02.13	SCALE 1:1	UNIT mm	WAVE HARDWARE ELECTRONICS CO.,LTD
									DESIGN	SIZE A4	WCON 维峰五金电子有限公司
									CHECK	SHEET 1/1	WAVE HARDWARE ELECTRONICS CO.,LTD
A0	09/02/13								APPROVE	PROJ.	2195-2XXSXXUNX1
REV	DATE	MODIFICATION	DESCRIPTION	CHANGE	APPROVE				TITLE:		PART NO.
									APPROVE		
									DM		
									Angle		
									±.3°		
									±.0.15		
									±.0.25		
									±.0.40		
									X.X		
									X.XX		
									X.XXX		
									OPERATION		
									WEIRD		
									DRAW		
									DESIGN		
									CHECK		
									APPROVE		
									APPROVE		
									DM		
									±.3°		
									±.0.15		
									±.0.25		
									±.0.40		
									X.X		
									X.XX		
									X.XXX		
									OPERATION		
									WEIRD		
									DRAW		
									DESIGN		
									CHECK		
									APPROVE		
									APPROVE		
									DM		
									±.3°		
									±.0.15		
									±.0.25		
									±.0.40		
									X.X		
									X.XX		
									X.XXX		
									OPERATION		
									WEIRD		
									DRAW		
									DESIGN		
									CHECK		
									APPROVE		
									APPROVE		
									DM		
									±.3°		
									±.0.15		
									±.0.25		
									±.0.40		
									X.X		
									X.XX		
									X.XXX		
									OPERATION		
									WEIRD		
									DRAW		
									DESIGN		
									CHECK		
									APPROVE		
									APPROVE		
									DM		
									±.3°		
									±.0.15		
									±.0.25		
									±.0.40		
									X.X		
									X.XX		
									X.XXX		
									OPERATION		
									WEIRD		
									DRAW		
									DESIGN		
									CHECK		
									APPROVE		
									APPROVE		
									DM		
									±.3°		
									±.0.15		
									±.0.25		
									±.0.40		
									X.X		
									X.XX		
									X.XXX		
									OPERATION		
									WEIRD		
									DRAW		
									DESIGN		
									CHECK		
									APPROVE		
									APPROVE		
									DM		
									±.3°		
									±.0.15		
									±.0.25		
									±.0.40		
									X.X		
									X.XX		
									X.XXX		
									OPERATION		
									WEIRD		
									DRAW		
									DESIGN		
									CHECK		
									APPROVE		
									APPROVE		
									DM		
									±.3°		
									±.0.15		
									±.0.25		
									±.0.40		
									X.X		
									X.XX		
									X.XXX		
									OPERATION		
									WEIRD		
									DRAW		
									DESIGN		
									CHECK		
									APPROVE		
									APPROVE		
									DM		
									±.3°		
									±.0.15		
									±.0.25		
									±.0.40		
									X.X		
									X.XX		
									X.XXX		
									OPERATION		
									WEIRD		
									DRAW		
									DESIGN		
									CHECK		
									APPROVE		
									APPROVE		
									DM		
									±.3°		
									±.0.15		
									±.0.25		
									±.0.40		
									X.X		
									X.XX		
									X.XXX		
									OPERATION		
									WEIRD		
									DRAW		
									DESIGN		
									CHECK		
									APPROVE		
									APPROVE		
									DM		
									±.3°		
									±.0.15		
									±.0.		