

HSF

NOTES:

- Rated Current:0.4AMP
- Contact Resistance:20mΩ max
- Withstand Voltage:200V AC/DC
- Insulation Resistance:500MΩ min
- Operation Temperature:-25℃ to +85℃



- Terminal:Phosphor Bronze Tin-Leadplated
- Fattig Nail:Brass Tin-Leadplated
- Housing:Thermoplastic UL94V-0
- Slider:Thermoplastic UL94V-0

Ordering Information



5140-XX R M U W X 01

No. of Pins
04-60P

Color
A=Brown
B=Black
W=White
F=Beige

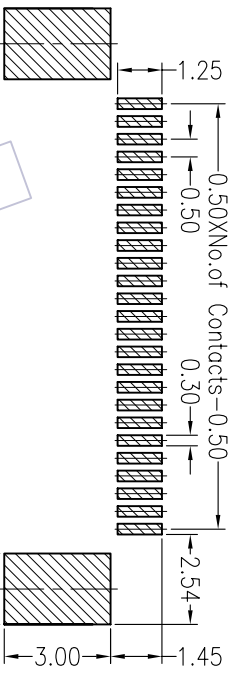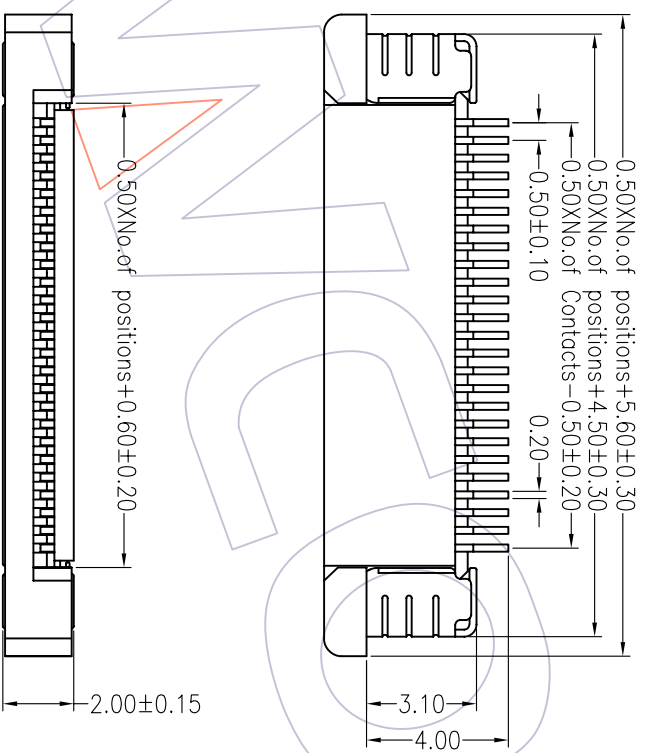

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)



No. of Pins	Dim "W"
04-34P	5.20
35-60P	5.70

WCON 维峰五金电子有限公司
WAFE HARDWARE ELECTRONICS CO. LTD

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW	SCALE	PART NO.
					Angle	± 3'			
A0	09/02/18	NEW			X.X	±0.40	William Chen	1:1	5140-XXRMUWX01
					X.XX	±0.25		A4	
					X.XXX	±0.15		1/1	0.50 FPC 90° SMT UP CONTACT WITH LOCK
									Customer NO.

1 2 3 4 5 6 7 8 9 10