

# HSF

**NOTES:**

Rated Current:0.4AMP  
 Contact Resistance:20mΩ max  
 Withstand Voltage:200V AC/DC  
 Insulation Resistance:500MΩ min  
 Operation Temperature:-25°C to +85°C



Terminal:Phosphor Bronze Tin-Leadplated  
 Fattig Nail:Brass Tin-Leadplated  
 Housing:Thermoplastic UL94V-0  
 Slider:Thermoplastic UL94V-0

## Ordering Information


5140-XX R M B W X 01

No.of Pins  
04-60P

Color  
 A=Brown  
 B=Black  
 W=White  
 F=Beige

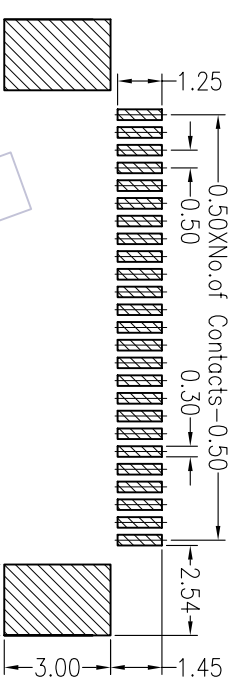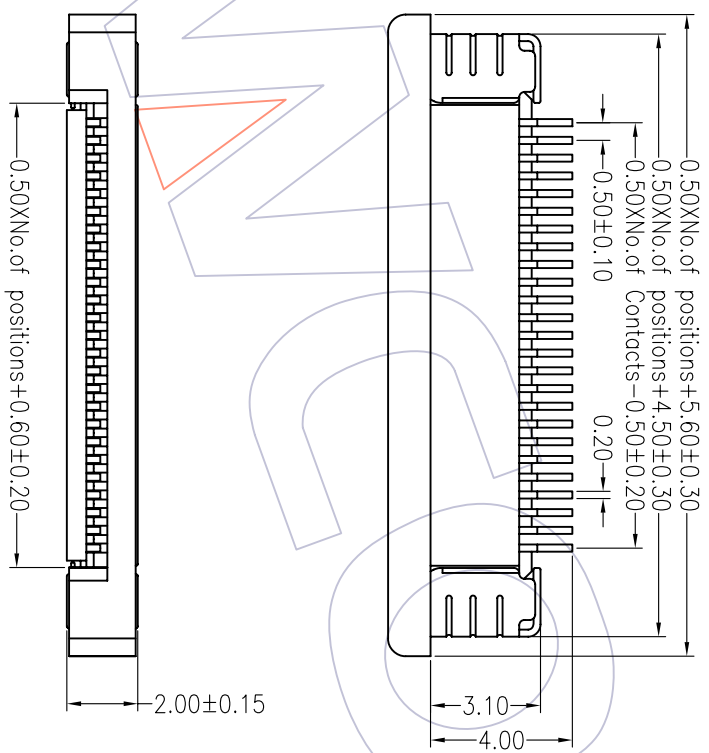

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)



No.of Pins	Dim" W"
04-34P	5.20
35-60P	5.70

**WCON** 维峰五金电子有限公司  
 WAFER HARDWARE ELECTRONICS CO.,LTD

OPERATION	±0.40	DRAW	William Chen	09/02/18	SCALE	1:1	PART NO.	5140-XXRMBWX01
X.X	±0.25	DESIGN			UNIT	mm		
X.XX	±0.15	CHECK			SIZE	A4	TITLE:	0.50 PFC 90° SMT BOTTOM CONTACT WITH LOCK
X.XXX	± 3'	APPROVE			SHEET	1/1	Customer NO.	
Angle					PROJ.			
DIM								
CHANGE	APPROVE							
MODIFICATION DESCRIPTION								
NEW								
09/02/18								
DATE								