

HSF

NOTES:




- Rated Current: 0.5AMP
- Contact Resistance: 30mΩ max
- Withstand Voltage: 500V AC/DC
- Insulation Resistance: 1000MΩ min
- Operation Temperature: -55°C to +85°C
- Contact Material: Phosphor Bronze
- Contact Plating: Sn Over Ni
- Insulator Material: Thermoplastic UL94V-0

Ordering Information

5130-XX S D D N X 01

No. of Pins
02~36P

Color
A=Brown
B=Black
W=White
E=Beige

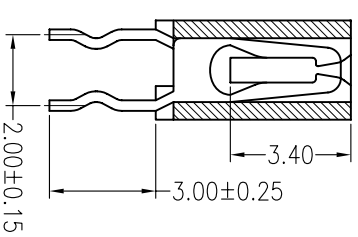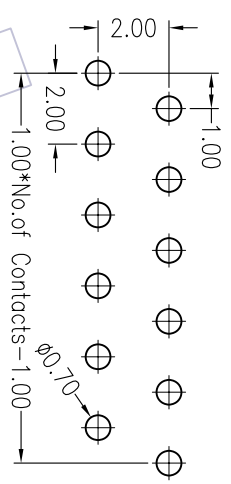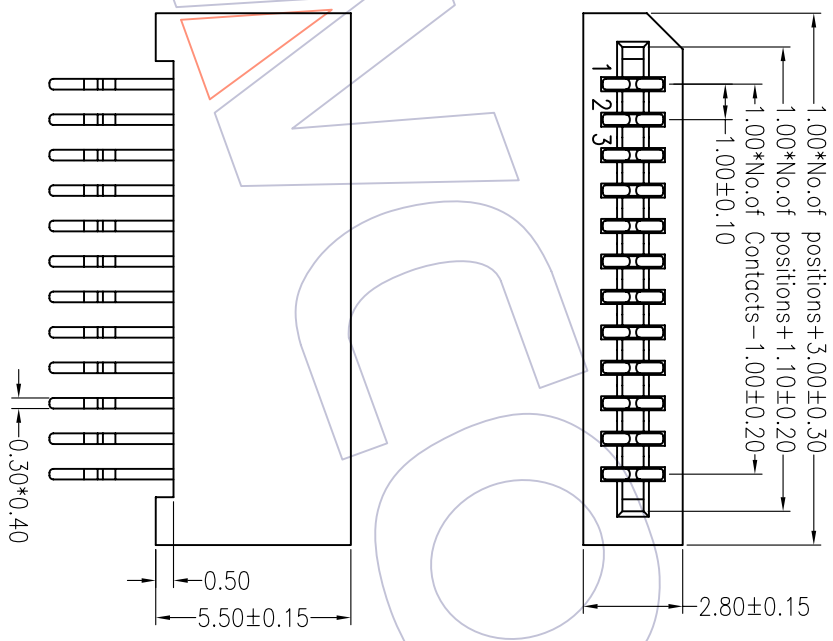

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

OPERATION	DRAW	Millennium Class	09/02/18	SCALE	1:1	<p>WCON 维峰五金电子有限公司 WAVE HARDWARE ELECTRONICS CO.,LTD</p>
X.X	DESIGN			UNIT	mm	
X.XX	CHECK			SIZE	A4	
X.XXX	ANGLE	±0.15		SHEET	1/1	PART NO.
Angle	± 3'			PROJ.		TITLE:
DIM	TOL					Customer NO.
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE		
A0	09/02/18	NEW				5130-XXSDDNX01
						1.00 FPC 180° DIP DUAL CONTACT W/O LOCK