

HSF

NOTES:




- Rated Current:0.5AMP
- Contact Resistance:30mΩ max
- Withstand Voltage:500V AC/DC
- Insulation Resistance:1000MΩ min
- Operation Temperature:-55℃ to +85℃
- Contact Material:Phosphor Bronze
- Contact Plating:Sn Over Ni
- Insulator Material:Thermoplastic UL94V-0

Ordering Information

5130-XX R M D N X 01

No.of Pins
02-36P

Color
A=Brown
B=Black
W=White
E=Beige

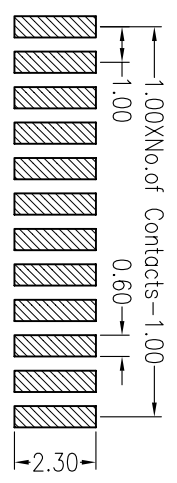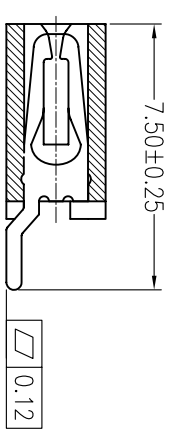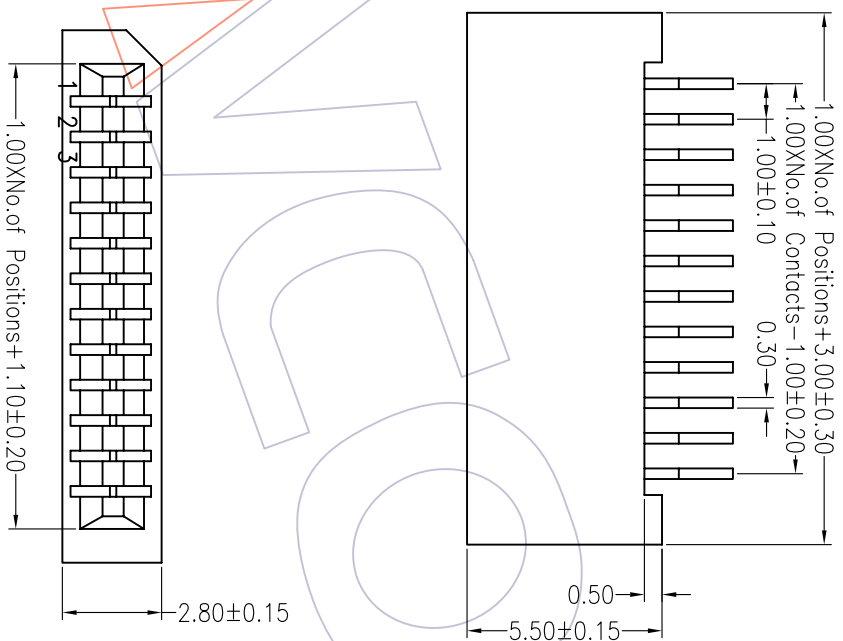

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW		SCALE		PART NO.	TITLE:
					Angle	± 3'	DESIGN	CHECK	UNIT	mm		
A0	09/02/18	NEW			X.XX	±0.40			1:1		5130-XXRMDNX01	1.00 FPC 90° SMT DUAL CONTACT W/O LOCK
					X.XX	±0.25	DESIGN					
					X.XX	±0.15	CHECK					
							APPROVE					

WCON 维峰五金电子有限公司
WAFER HARDWARE ELECTRONICS CO.,LTD

5130-XXRMDNX01

1.00 FPC 90° SMT DUAL CONTACT W/O LOCK