


# HSF

**NOTES:**

- Rated Current: 0.5AMP
- Contact Resistance: 30mΩ max
- Withstand Voltage: 500V AC/DC
- Insulation Resistance: 1000MΩ min
- Operation Temperature: -55°C to +85°C
- Contact Material: Phosphor Bronze
- Contact Plating: Sn Over Ni
- Insulator Material: Thermoplastic UL94V-0

Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

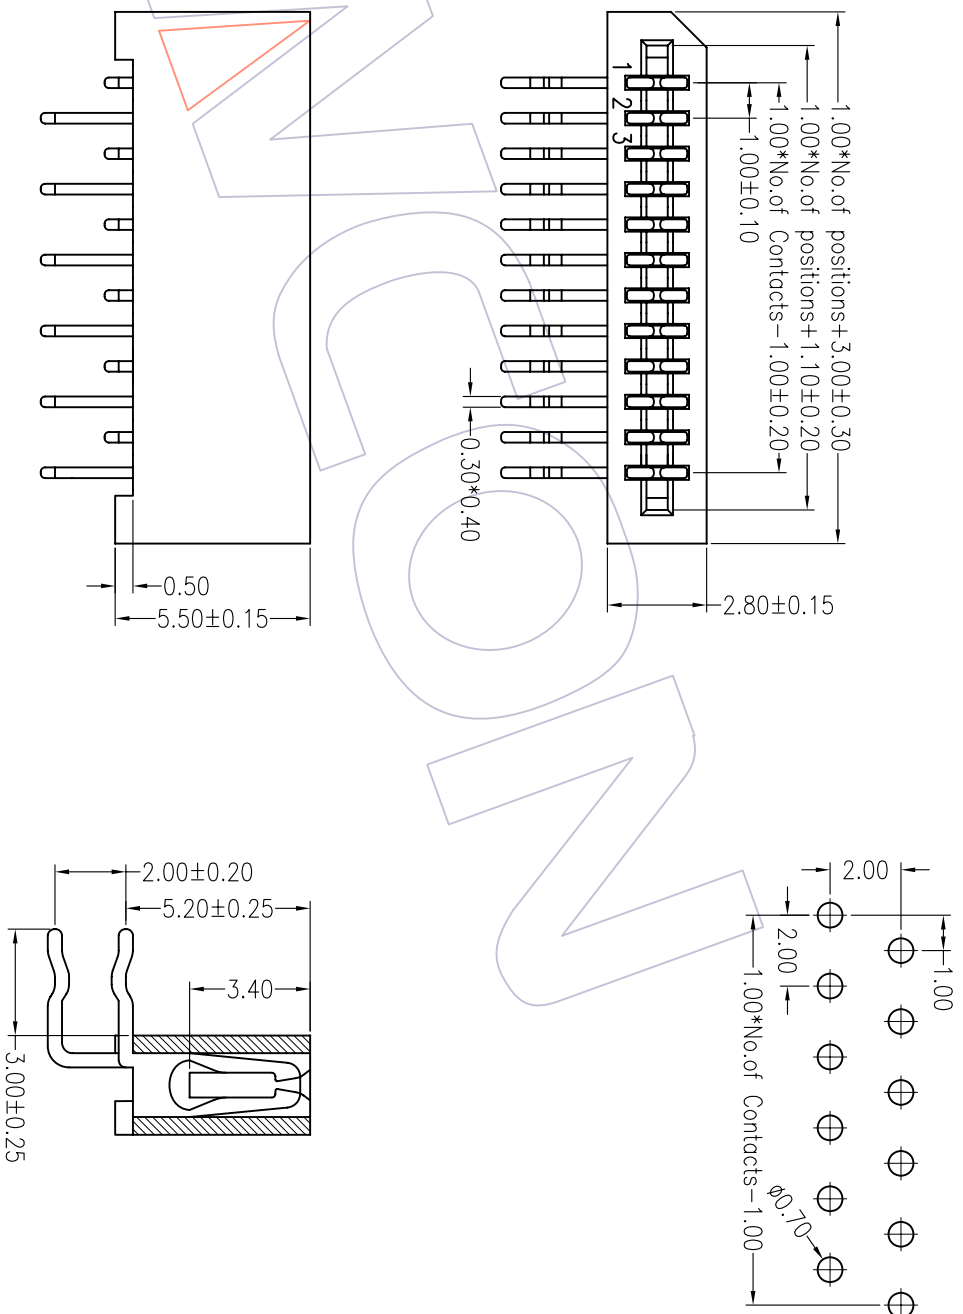

## Ordering Information

5130-XX R D D N X 01

- No. of Pins: 02-36P
- Color: A=Brown, B=Black, W=White, E=Beige

OPERATION		DRAW		SCALE		<p>维峰五金电子有限公司 WAVE HARDWARE ELECTRONICS CO. LTD</p>	
X.X	±0.40	DESIGN		UNIT	mm		
X.XX	±0.25	CHECK		SIZE	A4		
X.XXX	±0.15	APPROVE		SHEET	1/1	PART NO. 5130-XXRDDNXX01	
Angle	± 3'	APPROVE		PROJ.	Customer NO.	TITLE: 1.00 FPC 90° DIP DIAL CONTACT W/O LOCK	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE		
A0	09/02/18	NEW					

1 2 3 4 5 6 7 8 9 10