
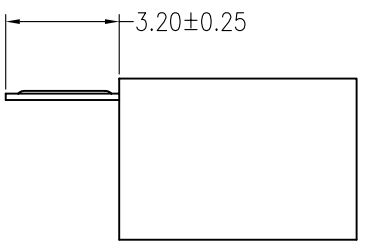
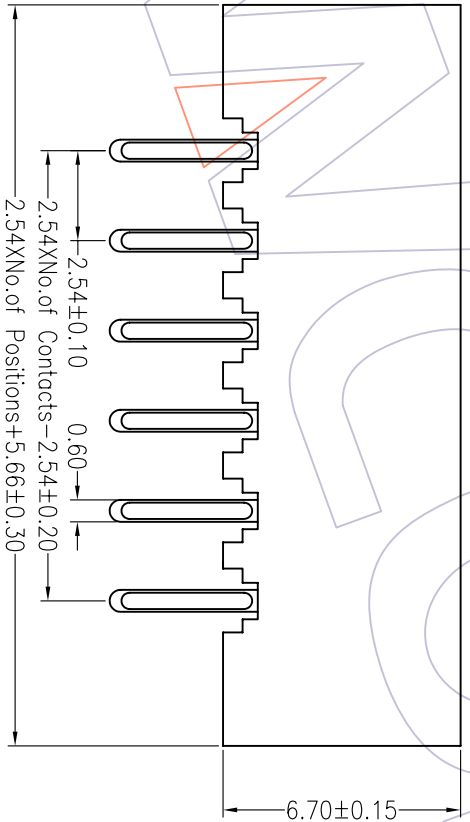



HSF

NOTES:

- Rated Current: 1.0AMP
- Contact Resistance: 30mΩ max
- Withstand Voltage: 500V AC/DC
- Insulation Resistance: 1000MΩ min
- Operation Temperature: -55°C to +85°C
- Contact Material: Phosphor Bronze
- Contact Plating: Sn Over Ni
- Insulator Material: Thermoplastic UL94V-0

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

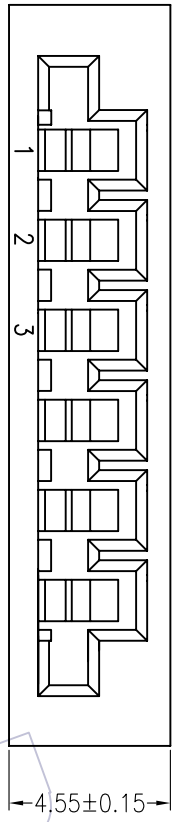

Ordering Information

5110-XX S D D N X 01

- No. of Pins: 03~27P
- Color: A=Brown, B=Black, W=White, E=Beige

| | | | | | | | | | | | | |
|-----|----------|--------------------------|--------|---------|-----------|-------|---------|------------------|----------|--------|-------|---|
| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | APPROVE | OPERATION | | DRAW | Millimeter Clear | 09/02/18 | SCALE | | PART NO. |
| | | | | | X.X | ±0.40 | | | | DESIGN | UNIT | |
| | | | | | X.XX | ±0.25 | CHECK | | | | A4 | 5110-XXSDDNX01 |
| A0 | 09/02/18 | NEW | | | X.XXX | ±0.15 | CHECK | | | | 1/1 | 2.54 FPC 180° DIP DIAL CONTACT W/O LOCK |
| | | | | | Angle | ± 3' | APPROVE | | | | PROJ. | Customer NO. |

WCON 维峰五金电子有限公司
WAFER HARDWARE ELECTRONICS CO., LTD