



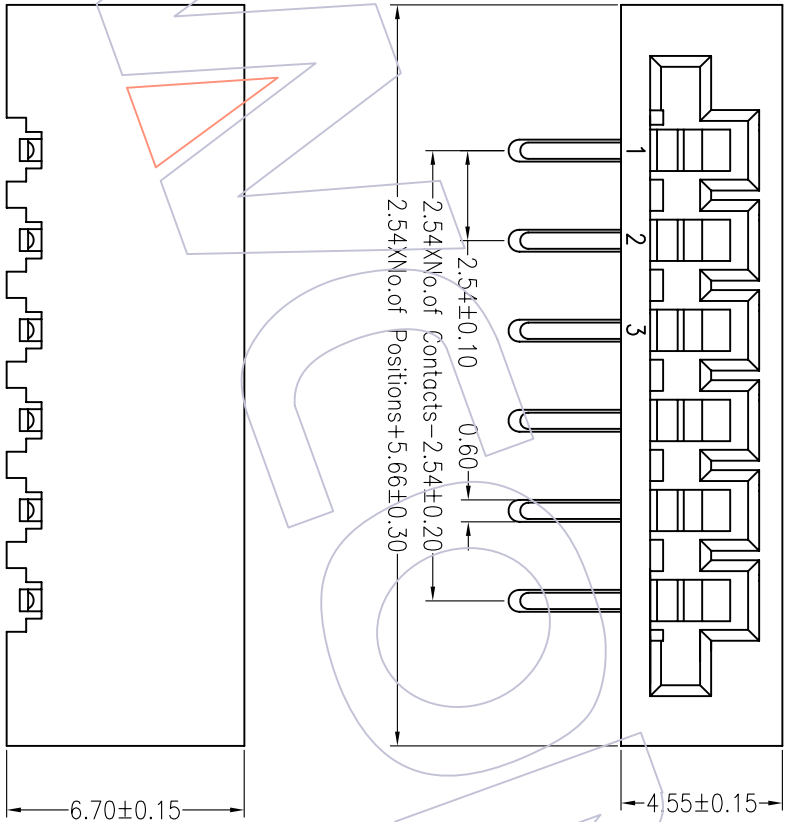

NOTES:

- Rated Current:1.0AMP
- Contact Resistance:30mΩ max
- Withstand Voltage:500V AC/DC
- Insulation Resistance:1000MΩ min
- Operation Temperature:-55°C to +85°C
- Contact Material:Phosphor Bronze
- Contact Plating:Sn Over Ni
- Insulator Material:Thermoplastic UL94V-0

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)



Ordering Information

5110-XX R D D N X 01

- No. of Pins
03-27P
- Color
A=Brown
B=Black
W=White
E=Beige

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	SCALE	PART NO.
A0	09/02/18	NEW			±0.40	DESIGN	1:1	5110-XXRDDNXX01
					±0.25	CHECK	A4	2.54 FPC 90° DIP DUAL CONTACT W/O LOCK
					±0.15		1/1	
					Angle ± 3°			
					DIM TOL	PROJ.		

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO. LTD