

HSF

NOTES:








- Rated Current:1.0AMP
- Contact Resistance:20mΩ max
- Withstand Voltage:500V AC/minute
- Insulation Resistance:1000MΩ min
- Operation Temperature:-40°C to +105°C
- Contact Material:Phosphor Bronze
- Contact Plating:Au or Sn Over Ni
- Insulator Material:Polyester(Ul94V-0)

Ordering Information

6310 - 068 S D XX P 01

No. of Pins per
068=68PIN

Contact Plating
G0=Gold Flash
G1=3u"Gold
G2=5u"Gold
G3=10u"Gold
G4=15u"Gold
G5=30u"Gold
S0=Gold Flash/Tin
S1=3u"Gold/Tin
S2=5u"Gold/Tin
S3=10u"Gold/Tin
S4=15u"Gold/Tin
S5=30u"Gold/Tin
SN=Tin

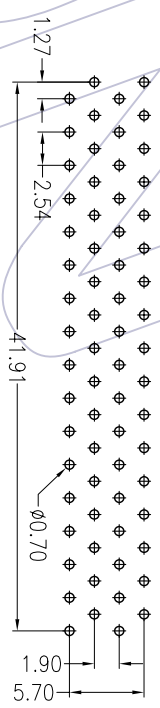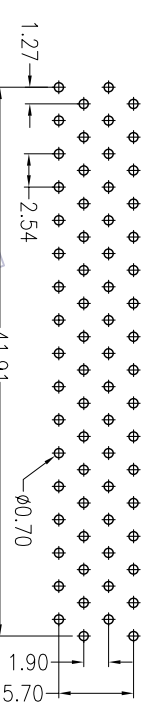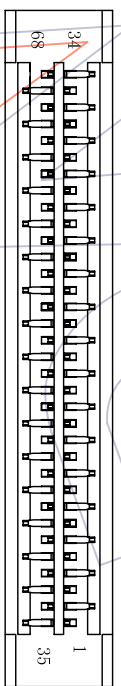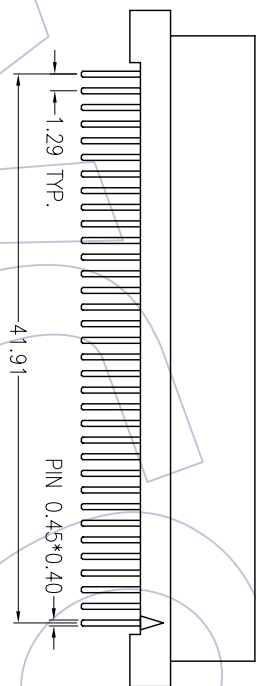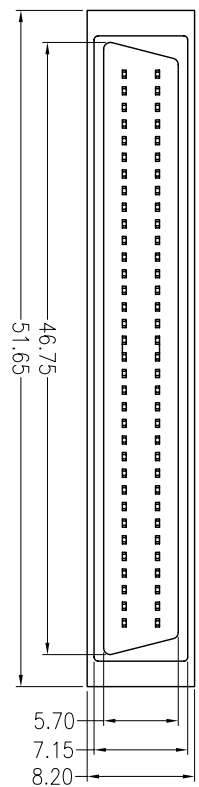

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW	WEIKD	09.02.16	SCALE	1:1	WCON	
					±	TOL						APPROVE	PART NO.
A0	09/02/16	NEW			X.X	±0.40	DESIGN			UNIT	mm	6310-068SDXXP01	维峰五金电子有限公司
					X.XX	±0.25	CHECK			SIZE	A4	68P MALE SCSI D-SUB 180° DIP	WAVE HARDWARE ELECTRONICS CO. LTD
					X.XXX	±0.15				SHEET	1/2		
					Angle	± 3'				PROJ.			
					DIM								

