




**NOTES:**

- Rated Current:1.0AMP
- Contact Resistance:20mΩ max
- Withstand Voltage:500V AC/DC
- Insulation Resistance:1000MΩ min
- Operation Temperature:-55℃ to +105℃
- Contact Material:Phosphor Bronze
- Contact Plating:Au or Sn Over Ni
- Insulator Material:PPS+30%G.F UL94V-0
- Normal Force:200 Grams min on Tin/Tin and Interface
- Durability:40 Cycles min

## Ordering Information

7210-XX M XX X XX

- No. of Pins: 28P 52P 32P 68P 44P 84P
- Contact Plating: G0=Gold Flash G1=3u"Gold G2=5u"Gold G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S1=3u"Gold/Tin S2=5u"Gold/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin
- Color: A=Brown B=Black
- Type: 01=Without Post 02=With Post

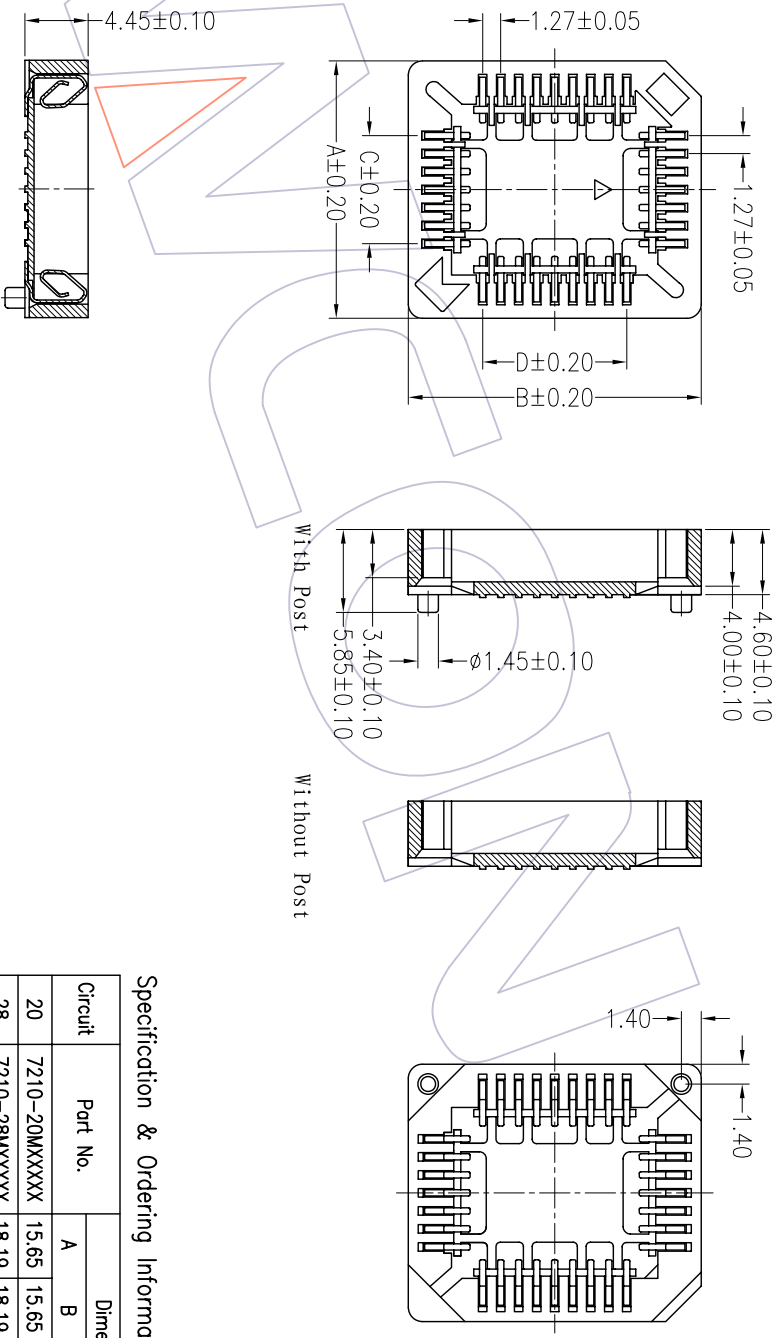

**Specification & Ordering Information:**

Circuit	Part No.	Dimension			
		A	B	C	D
20	7210-20MXXXXXX	15.65	15.65	5.08	5.08
28	7210-28MXXXXXX	18.19	18.19	7.62	7.62
32	7210-32MXXXXXX	18.15	20.65	7.62	10.16
44	7210-44MXXXXXX	23.27	23.27	12.70	12.70
52	7210-52MXXXXXX	25.81	25.81	15.24	15.24
68	7210-68MXXXXXX	30.89	30.89	20.32	20.32
84	7210-84MXXXXXX	35.97	35.97	25.40	25.40

Without Post	7210-XXMXXXXX01
With Post	7210-XXMXXXXX02

**WCON** 维峰五金电子有限公司  
WAFE HARDWARE ELECTRONICS CO. LTD

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW		SCALE	UNIT	SIZE	SHEET	TITLE:
					Angle	± 3'	APPROVE	CHECK					
A0	09/02/14	NEW			X.X	±0.40	DESIGN	09/02/14	1:1	mm	A4	1/1	PLCC SOCKET SMT H=4.45
					X.XX	±0.25	CHECK						
					X.XXX	±0.15	APPROVE						