HSF

NOTES:
Rated Current:0.5AMP
Contact Resistance:50mΩ max
Withstand Voltage:500V AC/DC
Insulation Resistance:100MΩ min
Operation Temperature:−25℃ to +80℃

Contact Material:Phosphor Bronze
Contact Plating:Au or Sn Over Ni
Insulator Material:High Temperature Plastic(UL94V−0)
Shell:Spcc ,Ni Plated

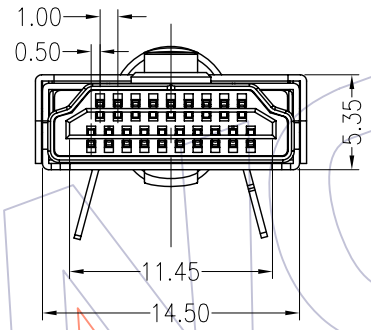

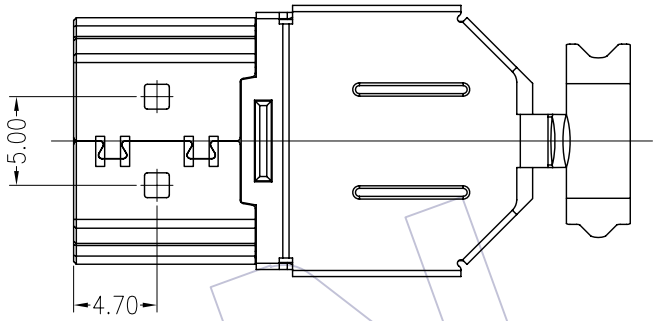

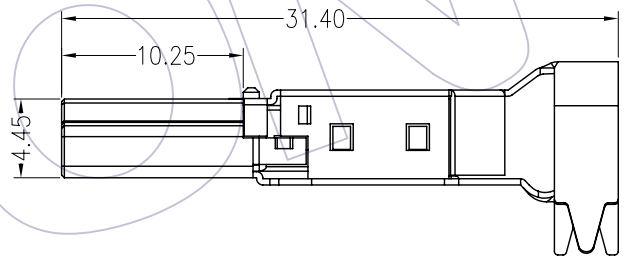

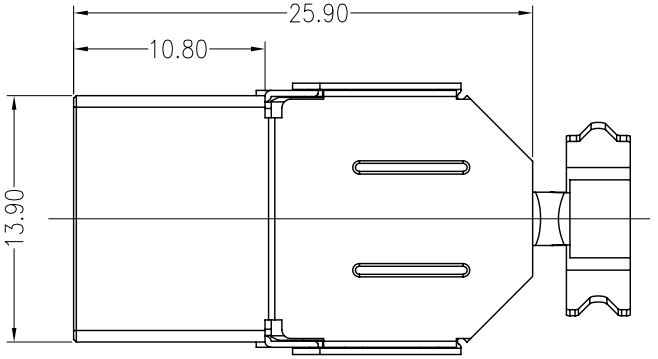

Ordering Information

6510-19 M XX A2 XX L X 01

Contact Plating	Shell Plating	Shell Material
G0=Gold Flash	G0=Gold Flash	B=Brass
G1=3u"Gold	G1=3u"Gold	P=Phosphor Bronze
G2=5u"Gold	G2=5u"Gold	S=SPCC
G3=10u"Gold	G3=10u"Gold	
G4=15u"Gold	G4=15u"Gold	
G5=30u"Gold	G5=30u"Gold	
S0=Gold Flash/Tin	SN=Tin	
S1=3u"Gold/Tin	NI=Nickel	
S2=5u"Gold/Tin		
S3=10u"Gold/Tin		
S4=15u"Gold/Tin		
S5=30u"Gold/Tin		
SN=Tin		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A0	09/03/10	NEW	———	———

OPERATION		DRAW	William Chen	09.03.10
X.X	±0.40	DESIGN		
X.XX	±0.25	CHECK		
X.XXX	±0.15	APPROVE		
Angle	± 3°			
DIM	TOL			

SCALE	1:1	WCON 维峰五金电子有限公司 WAFE HARDWARE ELECTRONICS CO.LTD	
UNIT	mm		
SIZE	A4	PART NO.	6510-19MXXA2XXLX01
SHEET	1/1	TITLE:	HDMI CONNECTOR MALE LONG SHELL
PROJ.		Customer NO.	