


HSF

NOTES:

- Rated Current:1.5AMP
- Contact Resistance:30mΩ max
- Withstand Voltage:500V AC/DC
- Insulation Resistance:1000MΩ min
- Operation Temperature:-55℃ to +125℃
- Contact Material:Brass
- Contact Plating:Au or Sn Over Ni
- Insulator Material:PA6T+30%G.F UL94V-0

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

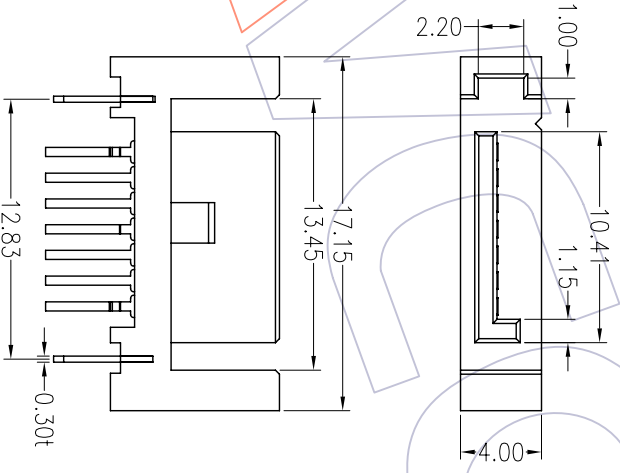

Ordering Information

5411-07 D1 XX C 0 X

- Contact Plating
- G0=Gold Flash
 - G1=3u"Gold
 - G2=5u"Gold
 - G3=10u"Gold
 - G4=15u"Gold
 - G5=30u"Gold
 - S0=Gold Flash/Tin
 - S1=3u"Gold/Tin
 - S2=5u"Gold/Tin
 - S3=10u"Gold/Tin
 - S4=15u"Gold/Tin
 - S5=30u"Gold/Tin
 - SN=Tin

PART NO.	A
5411-07D1XXC01	2.05
5411-07D1XXC02	3.20

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	SCALE	PART NO.	TITLE:																	
A0	09/03/12	NEW			<table border="1"> <tr> <td>X.X</td> <td>±0.40</td> </tr> <tr> <td>X.XX</td> <td>±0.25</td> </tr> <tr> <td>X.XXX</td> <td>±0.15</td> </tr> <tr> <td>Angle</td> <td>± 3'</td> </tr> <tr> <td>DIM</td> <td>TOL</td> </tr> </table>	X.X	±0.40	X.XX	±0.25	X.XXX	±0.15	Angle	± 3'	DIM	TOL	<table border="1"> <tr> <td>Millimeter</td> <td>09/03/12</td> </tr> <tr> <td>DESIGN</td> <td></td> </tr> <tr> <td>CHECK</td> <td></td> </tr> </table>	Millimeter	09/03/12	DESIGN		CHECK		1:1	A4	SEE TABLE	SATA 7P MALE CONNECTOR 180° DIP
X.X	±0.40																									
X.XX	±0.25																									
X.XXX	±0.15																									
Angle	± 3'																									
DIM	TOL																									
Millimeter	09/03/12																									
DESIGN																										
CHECK																										

WCON 维峰五金电子有限公司
WAFER HARDWARE ELECTRONICS CO.,LTD