


HSF

NOTES:

- Rated Current: 1.5AMP
- Contact Resistance: 30mΩ max
- Withstand Voltage: 500V AC/DC
- Insulation Resistance: 1000MΩ min
- Operation Temperature: -55°C to +125°C
- Contact Material: Brass
- Contact Plating: Au or Sn Over Ni
- Insulator Material: PA6T+30%G.F UL94V-0

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

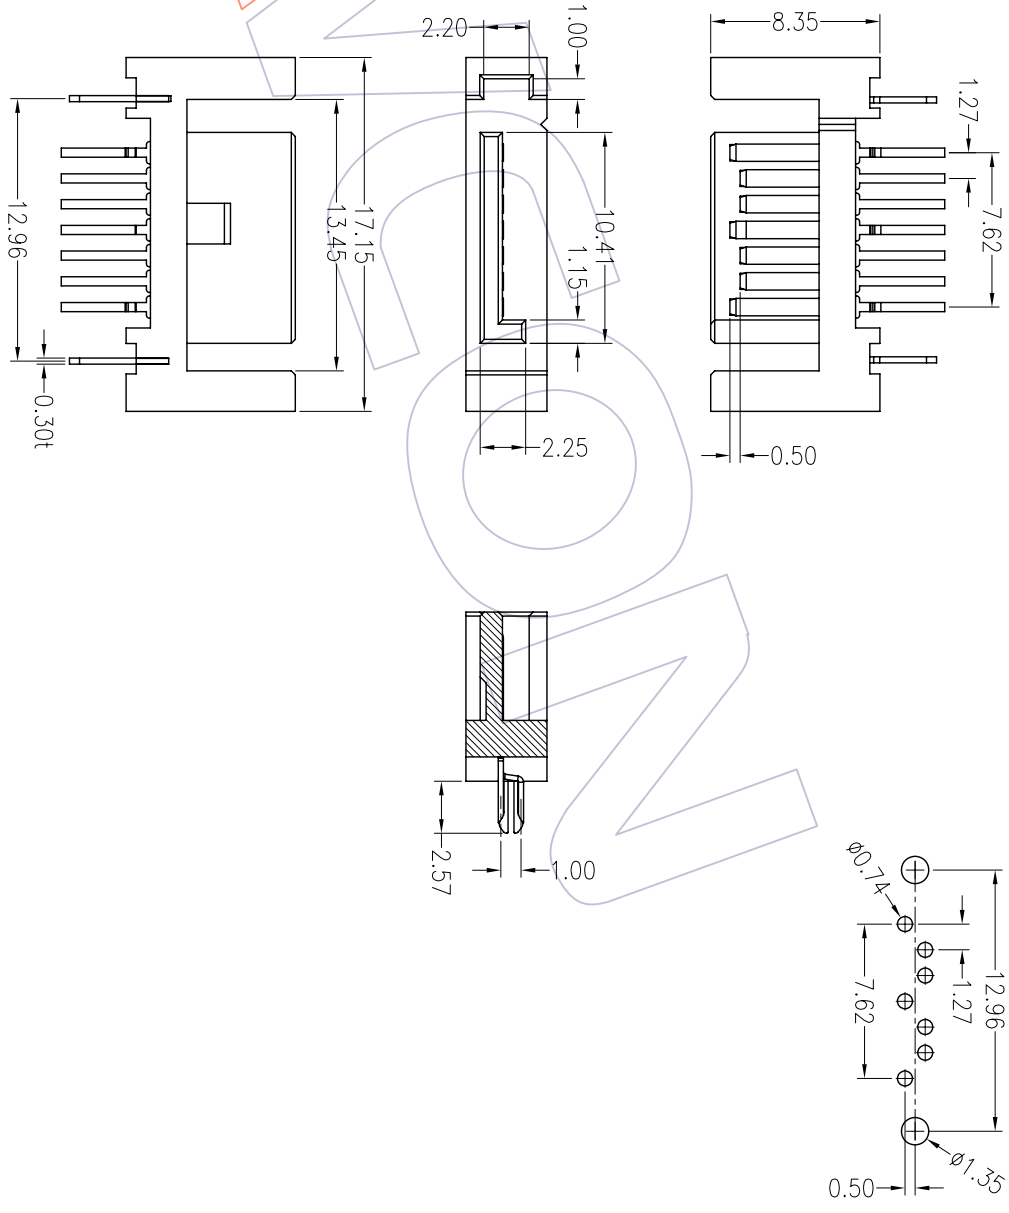

Ordering Information

5411-07 D1 XX C 03

- Contact Plating
- G0=Gold Flash
- G1=3u"Gold
- G2=5u"Gold
- G3=10u"Gold
- G4=15u"Gold
- G5=30u"Gold
- S0=Gold Flash/Tin
- S1=3u"Gold/Tin
- S2=5u"Gold/Tin
- S3=10u"Gold/Tin
- S4=15u"Gold/Tin
- S5=30u"Gold/Tin
- SN=Tin

OPERATION		DRAW		SCALE		 WCON 维峰五金电子有限公司 WAFER HARDWARE ELECTRONICS CO.,LTD 5411-07D1XXC03	
X.X	±0.40	DESIGN	1:1	UNIT	mm		
X.XX	±0.25	CHECK	A4	SHEET	1/1	PART NO.	
X.XXX	±0.15	APPROVE	PROJ.	TITLE:		SATA 7P MALE CONNECTOR 180° DIP	
Angle	± 3'			Customer NO.			
DIM	TOL						

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	SCALE	PART NO.
A0	09/03/12	NEW			X.X	DESIGN	1:1	5411-07D1XXC03
					X.XX	CHECK	A4	
					X.XXX	APPROVE	1/1	
					Angle	PROJ.		
					DIM			