

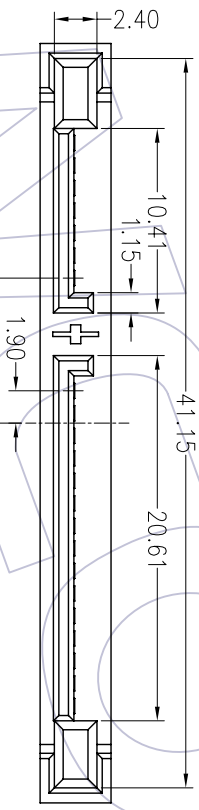
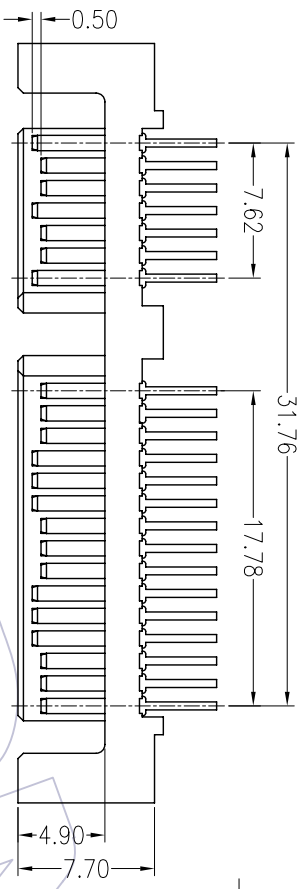


HSF

NOTES:

- Rated Current:1.5AMP
- Contact Resistance:30mΩ max
- Withstand Voltage:500V AC/DC
- Insulation Resistance:1000MΩ min
- Operation Temperature:-55℃ to +125℃
- Contact Material:Brass
- Contact Plating:Au or Sn Over Ni
- Insulator Material:PA6T+30%G.F UL94V-0

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)



Ordering Information

5411-22 D1 XX C 02

- Contact Plating
- G0=Gold Flash
- G1=3u"Gold
- G2=5u"Gold
- G3=10u"Gold
- G4=15u"Gold
- G5=30u"Gold
- S0=Gold Flash/Tin
- S1=3u"Gold/Tin
- S2=5u"Gold/Tin
- S3=10u"Gold/Tin
- S4=15u"Gold/Tin
- S5=30u"Gold/Tin
- SN=Tin

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	SCALE	PART NO.
A0	09/03/12	NEW			X.X ±0.40	DESIGN	1:1 mm	5411-22D1XXC02
					X.XX ±0.25	CHECK	A4	
					X.XXX ±0.15	APPROVE	1/1	
					Angle ± 3'	PROJ.	Customer NO.	

WCON 维峰五金电子有限公司
WAFER HARDWARE ELECTRONICS CO.,LTD

PART NO. 5411-22D1XXC02
TITLE: SATA 7P+15P MALE CONNECTOR 180° DIP