

HSF




NOTES:

- Rated Current:1.5AMP
- Contact Resistance:30mΩ max
- Withstand Voltage:500V AC/DC
- Insulation Resistance:1000MΩ min
- Operation Temperature:-55℃ to +125℃
- Contact Material:Brass
- Contact Plating:Au or Sn Over Ni
- Insulator Material:PA6T+30%G.F UL94V-0

Ordering Information

5411-22 D 2 XX C 0 1

- Contact Plating
- G0=Gold Flash
- G1=3u"Gold
- G2=5u"Gold
- G3=10u"Gold
- G4=15u"Gold
- G5=30u"Gold
- S0=Gold Flash/Tin
- S1=3u"Gold/Tin
- S2=5u"Gold/Tin
- S3=10u"Gold/Tin
- S4=15u"Gold/Tin
- S5=30u"Gold/Tin
- SN=Tin

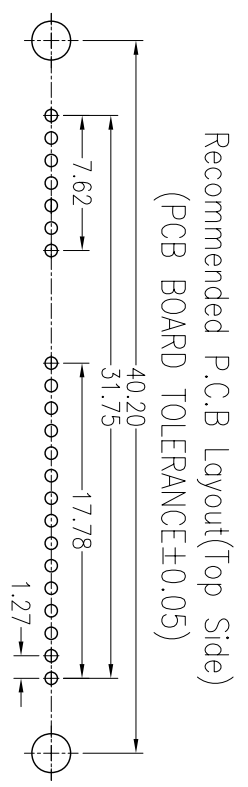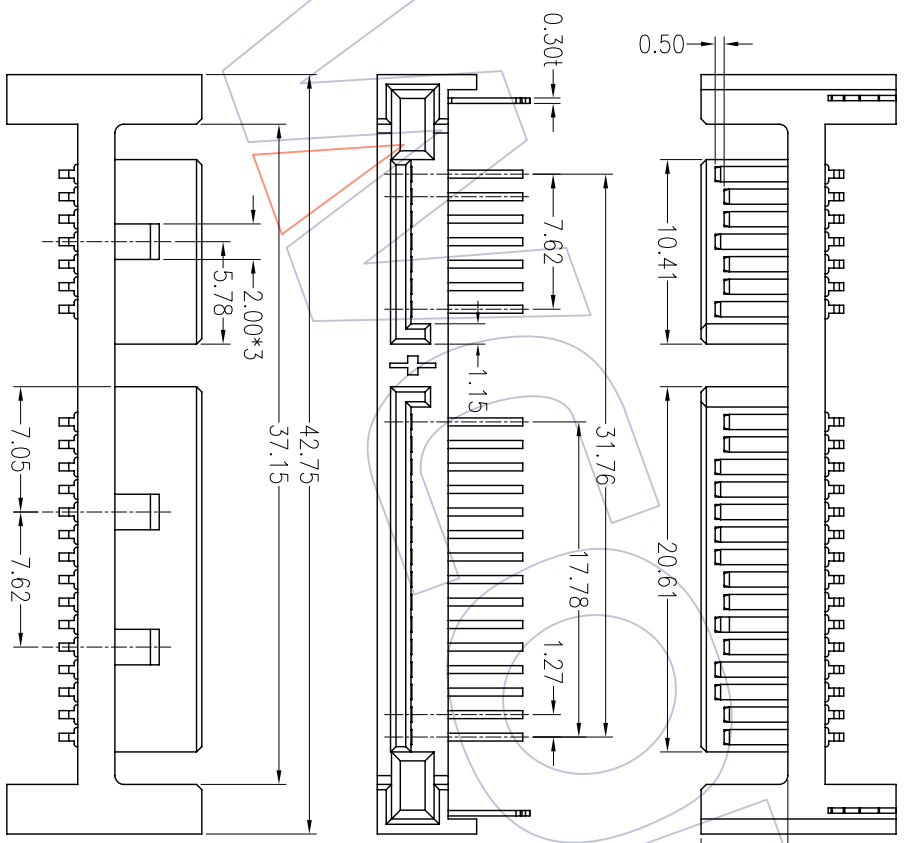

OPERATION	OPERATION	DRAW	Drawn	09/03/12	SCALE	1:1	WCON 维峰五金电子有限公司 WAVE HARDWARE ELECTRONICS CO. LTD
X.X	±0.40	DESIGN			UNIT	mm	
X.XX	±0.25	CHECK			SIZE	A4	PART NO. 5411-22D2XXC01
X.XXX	±0.15	APPROVE			SHEET	1/1	
Angle	± 3°				TITLE:	SATA 7P+1SP MALE CONNECTOR 90° DIP HP CONTACT	
DIM	TOL	APPROVE			PROJ.	Customer NO.	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE			
A0	09/03/12	NEW					