



HSF

NOTES:

Rated Current:1.5AMP
 Contact Resistance:30mΩ max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ min
 Operation Temperature:-55℃ to +125℃

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA6T+30%G.F UL94V-0

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

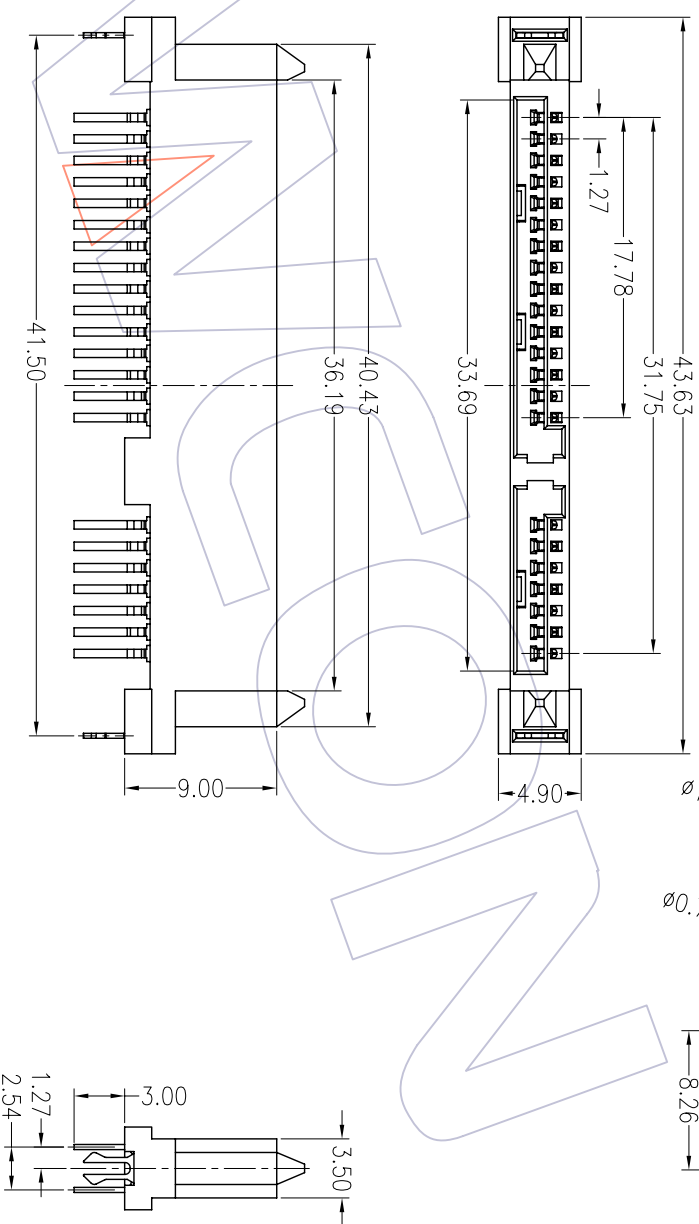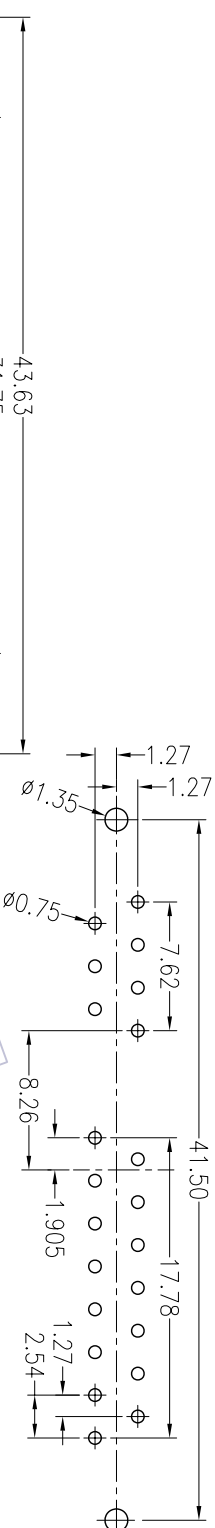

Ordering Information

5420-22 D 1 XX C 0 1

- Contact Plating
- G0=Gold Flash
- G1=3u"Gold
- G2=5u"Gold
- G3=10u"Gold
- G4=15u"Gold
- G5=30u"Gold
- S0=Gold Flash/Tin
- S1=3u"Gold/Tin
- S2=5u"Gold/Tin
- S3=10u"Gold/Tin
- S4=15u"Gold/Tin
- S5=30u"Gold/Tin
- SN=Tin

OPERATION		DRAW		SCALE		 维峰五金电子有限公司 WAVE HARDWARE ELECTRONICS CO.,LTD	
X.X	±0.40	Millennium Class		1:1	mm		
DESIGN		CHECK		PART NO.		5420-22D1XXC01	
X.XX	±0.25	APPROVE		SHEET		SATA 7P+15P FEMALE CONNECTOR 180° DIP	
X.XXX	±0.15	APPROVE		PROJ.		Customer NO.	
Angle	± 3'	APPROVE		PROJ.		Customer NO.	
DIM	TOL	APPROVE		PROJ.		Customer NO.	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE		APPROVE	
A0	09/03/12	NEW					