

HSF


NOTES:

Rated Current:1.5AMP
 Contact Resistance:30mΩ max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ min
 Operation Temperature:-55℃ to +125℃
 Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA6T+30%G.F UL94V-0

Ordering Information

5420-1 5 S 1 XX C 0 1

- Contact Plating
- G0=Gold Flash
- G1=3u"Gold
- G2=5u"Gold
- G3=10u"Gold
- G4=15u"Gold
- G5=30u"Gold
- S0=Gold Flash/Tin
- S1=3u"Gold/Tin
- S2=5u"Gold/Tin
- S3=10u"Gold/Tin
- S4=15u"Gold/Tin
- S5=30u"Gold/Tin
- SN=Tin

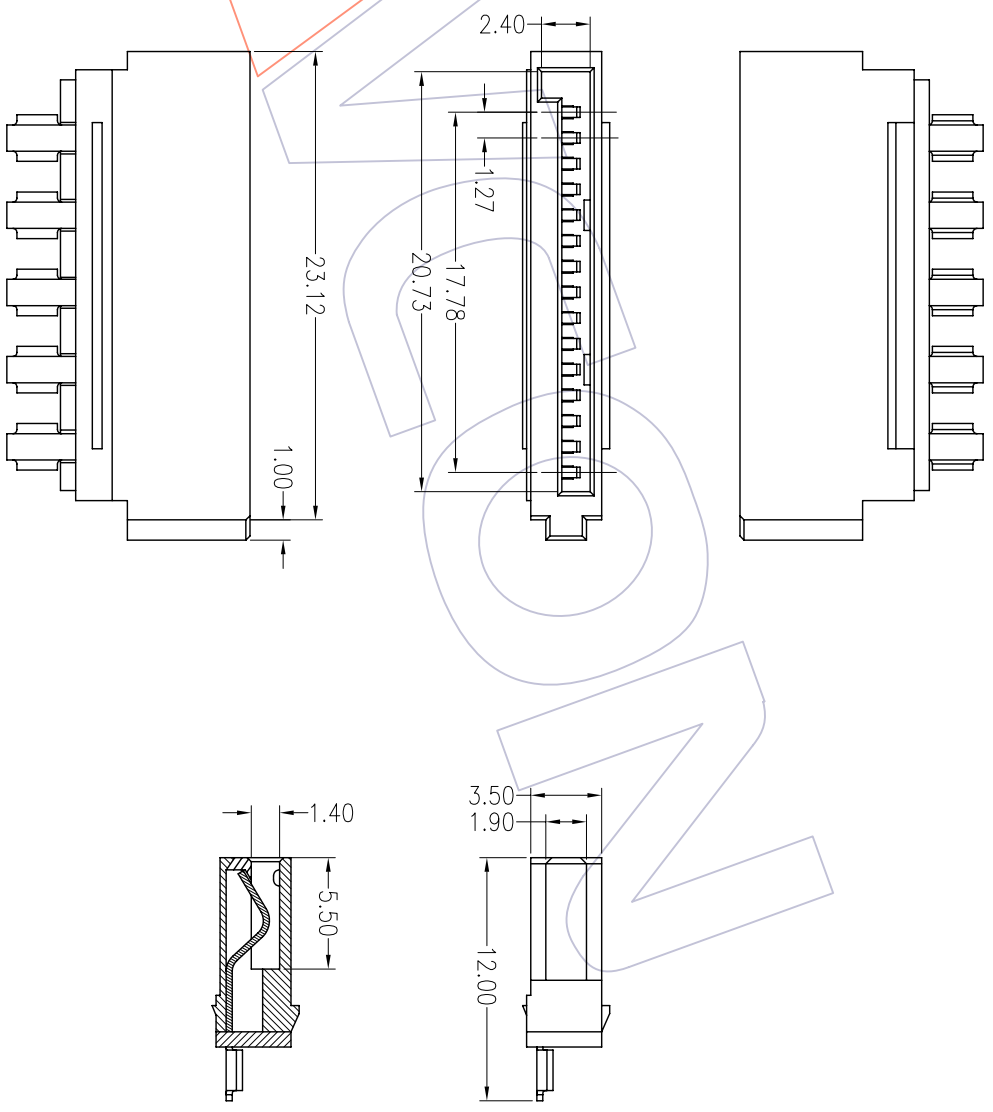

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	SCALE	PART NO.	TITLE:
A0	09/03/12	NEW			X.X ±0.40	DESIGN	1:1	5420-15S1XXC01	SATA 15P FEMALE CONNECTOR SOLDER
					X.XX ±0.25	CHECK	A4		
					X.XXX ±0.15	APPROVE	1/1		
					Angle ± 3'		Customer NO.		

WCON 维峰五金电子有限公司
 WAFER HARDWARE ELECTRONICS CO.,LTD