HSF

NOTES:
Rated Current:3.0AMP
Contact Resistance:20mΩ max
Withstand Voltage:500V AC/Minute
Insulation Resistance:1000MΩ min
Operation Temperature:−55℃ to +105℃

Material:Brass
Thickness:0.20
Finish:Gold or Tin−Plated
Q'ty/Reel:10,000PCS

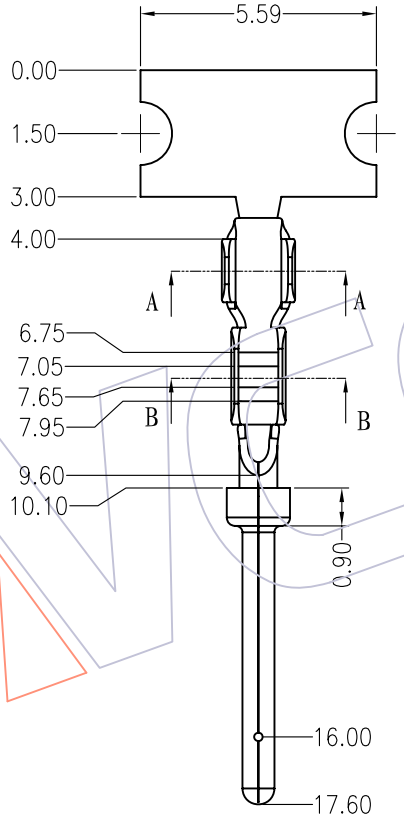

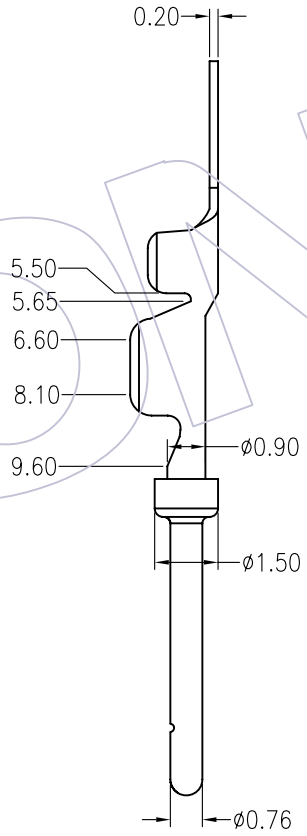



Section A−A



Section B−B

Ordering Information

T6211 - M C 0 B XX 01

Contact Material	Contact Plating
B=Brass	G0=Gold Flash
P=Phosphor bronze	G1=3u"Gold
	G2=5u"Gold
	G3=10u"Gold
	G4=15u"Gold
	G5=30u"Gold
	S0=Gold Flash/Tin
	S1=3u"Gold/Tin
	S2=5u"Gold/Tin
	S3=10u"Gold/Tin
	S4=15u"Gold/Tin
	S5=30u"Gold/Tin
	SN=Tin

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A0	09/03/07	NEW	———	———

OPERATION		DRAW	William Chen	09.03.07
X.X	±0.30	DESIGN		
X.XX	±0.25			
X.XXX	±0.15	CHECK		
Angle	± 3°	APPROVE		
DIM	TOL			

SCALE	1:1
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WCON 维峰五金电子有限公司
WAFE HARDWARE ELECTRONICS CO. LTD

PART NO.	T6211−MC0BXX01
TITLE:	HD−SUB CONNECTOR CRIMP TYPE MALE TERMINAL
Customer NO.	