




NOTES:

Rated Current:3.0AMP
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC/Minute
 Insulation Resistance:1000MΩ min
 Operation Temperature:-55℃ to +105℃
 Material:Phosphor bronze
 Thickness:0.20
 Finish:Gold or Tin-Plated
 Q'ty/Reel:10,000PCS

Ordering Information

T6221 - F C 0 P XX 01

- | | |
|-------------------|-------------------|
| Contact Material | Contact Plating |
| B=Brass | G0=Gold Flash |
| P=Phosphor bronze | G1=3u"Gold |
| | G2=5u"Gold |
| | G3=10u"Gold |
| | G4=15u"Gold |
| | G5=30u"Gold |
| | S0=Gold Flash/Tin |
| | S1=3u"Gold/Tin |
| | S2=5u"Gold/Tin |
| | S3=10u"Gold/Tin |
| | S4=15u"Gold/Tin |
| | S5=30u"Gold/Tin |
| | SN=Tin |

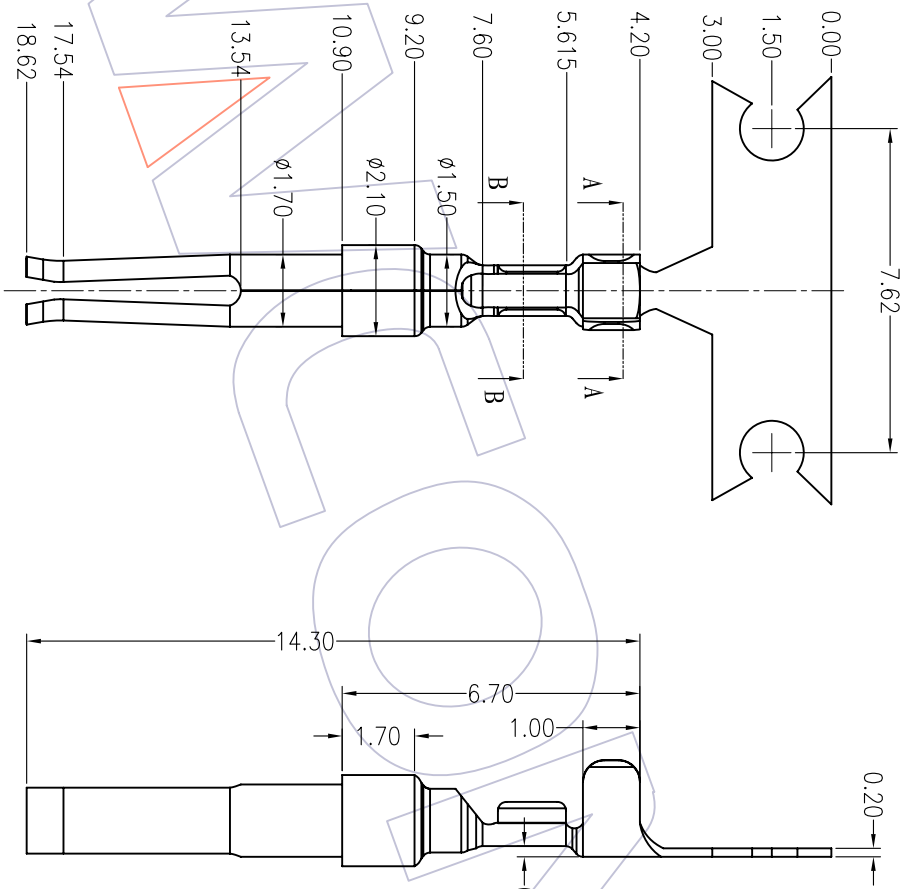

DIM	ANG	#20-22	#24-26	#20-30
A		2.20	2.14	1.90
B		2.70	2.26	1.72
C		2.00	1.75	1.67
D		2.13	1.54	1.48

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	SCALE	PART NO.	TITLE:							
A0	09/03/07	NEW			<table border="1"> <tr> <td>X.X</td> <td>±0.30</td> </tr> <tr> <td>X.XX</td> <td>±0.25</td> </tr> <tr> <td>X.XXX</td> <td>±0.15</td> </tr> <tr> <td>Angle</td> <td>± 3'</td> </tr> </table>	X.X	±0.30	X.XX	±0.25	X.XXX	±0.15	Angle	± 3'	1:1	T6221-FC0PXX01	D-SUB CONNECTOR CRIMP TYPE FEMALE TERMINAL
X.X	±0.30															
X.XX	±0.25															
X.XXX	±0.15															
Angle	± 3'															
					<table border="1"> <tr> <td>X.X</td> <td>DESIGN</td> </tr> <tr> <td>X.XXX</td> <td>CHECK</td> </tr> </table>	X.X	DESIGN	X.XXX	CHECK							
X.X	DESIGN															
X.XXX	CHECK															
					<table border="1"> <tr> <td>OPERATION</td> <td>DRAW</td> </tr> <tr> <td>DESIGN</td> <td>CHECK</td> </tr> </table>	OPERATION	DRAW	DESIGN	CHECK							
OPERATION	DRAW															
DESIGN	CHECK															

WCON 维峰五金电子有限公司
 WAFER HARDWARE ELECTRONICS CO. LTD

09/03/07
 09/03/07
 A4
 1/1
 Customer NO.