HSF

NOTES:
Rated Current:3.0AMP
Contact Resistance:20mΩ max
Withstand Voltage:500V AC/Minute
Insulation Resistance:1000MΩ min
Operation Temperature:−55℃ to +105℃

Contact Material:Phosphor Bronze/Brass
Contact plating:Au or Tin over Ni
Insulator Material:PBT+30%G.F UL94V−0
Sheel:Cold Roller Steel,Ni Plated
Nut:Brass,Tin over Ni Plated

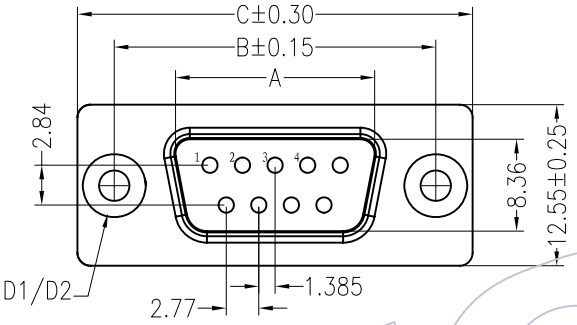

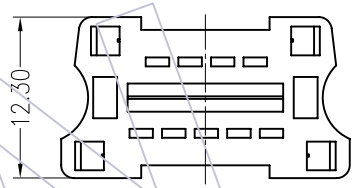

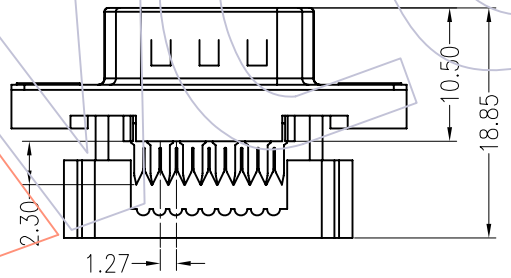

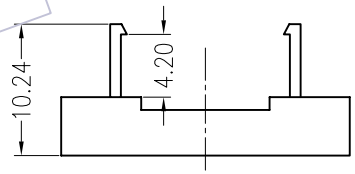

Ordering Information

6224- XX M N XX X 0 X

No.of Pins	Contact Plating	Insulator Color	Screw
09,15,25,37P	G0=Gold Flash	B:Black	1=Without Screw
	G1=3u"Gold	W:White	2=With Screw
	G2=5u"Gold	U:Blue	
	G3=10u"Gold	G:Grey	
	G4=15u"Gold		
	G5=30u"Gold		
	S0=Gold Flash/Tin		
	S1=3u"Gold/Tin		
	S2=5u"Gold/Tin		
	S3=10u"Gold/Tin		
	S4=15u"Gold/Tin		
	S5=30u"Gold/Tin		
	SN=Tin		

D1	6224-XXMNXXX01
D2	6224-XXMNXXX02

No. of Positions	DIM "A"	DIM "B"	DIM "C"	DIM "D1"	DIM "D2"
09	16.92	24.99	30.81	Without Screw ø3.20	With Screw #4-40
15	25.25	33.32	39.14		
25	38.96	47.04	53.04		
37	55.42	63.50	69.32		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A0	09/03/07	NEW	———	———

OPERATION		DRAW	William Chen	09.03.07
X.X	±0.30	DESIGN		
X.XX	±0.25			
X.XXX	±0.15	CHECK		
Angle	± 3°	APPROVE		
DIM	TOL			

SCALE	1:1
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WCON 维峰五金电子有限公司
WAFE HARDWARE ELECTRONICS CO.LTD

PART NO.	SEE TABLE
TITLE:	D-SUB MALE DUAL ROW IDC TYPE
Customer NO.	