

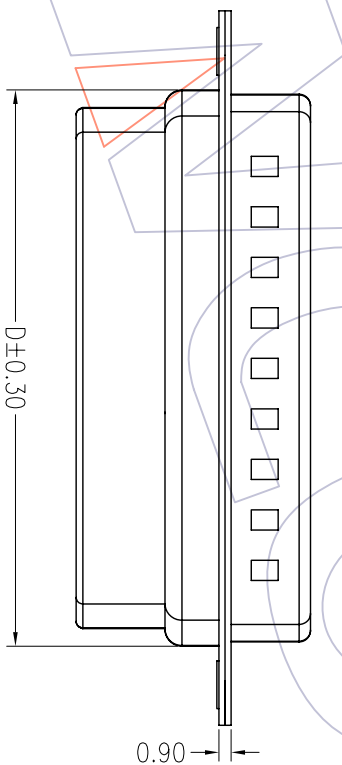


HSF

NOTES:

- Rated Current: 3.0AMP
- Contact Resistance: 20mΩ max
- Withstand Voltage: 500V AC/Minute
- Insulation Resistance: 1000MΩ min
- Operation Temperature: -55°C to +105°C
- Insulator Material: PBT+30%G.F UL94V-0
- Sheet: Cold Roller Steel, Ni Plated

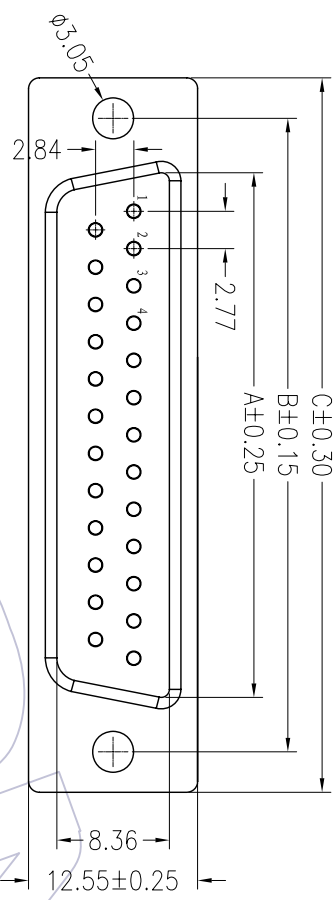

Ordering Information

6221-XX M N XX X 01

- No. of Pins: 09, 15, 25, 37P
- Type:
 - F=With Front Nut
 - B=With Back Nut
 - Y=With Back Fork
 - N=Without Nut
 - And Fork
- Contact Plating:
 - G0=Gold Flash
 - G1=3u"Gold
 - G2=5u"Gold
 - G3=10u"Gold
 - G4=15u"Gold
 - G5=30u"Gold
 - S0=Gold Flash/Tin
 - S1=3u"Gold/Tin
 - S2=5u"Gold/Tin
 - S3=10u"Gold/Tin
 - S4=15u"Gold/Tin
 - S5=30u"Gold/Tin
 - SN=Tin
- Insulator Color:
 - B:Black
 - W:White
 - U:Blue
 - G:Grey

No. of Positions	DIM "A"	DIM "B"	DIM "C"	DIM "D"
09	16.92	24.99	30.81	19.28
15	25.25	33.32	39.14	27.65
25	38.96	47.04	53.04	41.30
37	55.42	63.50	69.32	57.44

WCON 维峰五金电子有限公司
WAFE HARDWARE ELECTRONICS CO. LTD

PART NO. 6221-XXMXXXX01

TITLE: D-SUB MALE DUAL ROW CRIMP TYPE

OPERATION	DRAW	SCALE
X.X	<i>William Chen</i>	1:1
X.XX	DESIGN	UNIT
X.XXX	CHECK	SIZE
Angle	APPROVE	SHEET
DIM		PROJ.

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A0	09/03/07	NEW		