

HSF

NOTES:


Rating Voltage:125V AC/DC
 Current Rating:1.0AMP
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:100MΩ min
 Operation Temperature:-25°C to +85°C

Contact Material:Brass
 Contact plating:Au or Sn Over Ni
 Latch Material:Brass
 Latch plating:Sn Over Ni
 Insulator Material:High Temperature Plastic UL94V-0

Ordering Information

WF 1254 - WZ XX X R 1

No. of pins Color Packing
 02~30pin E=Beige T=Tube
 W=White R=Tape&Reel

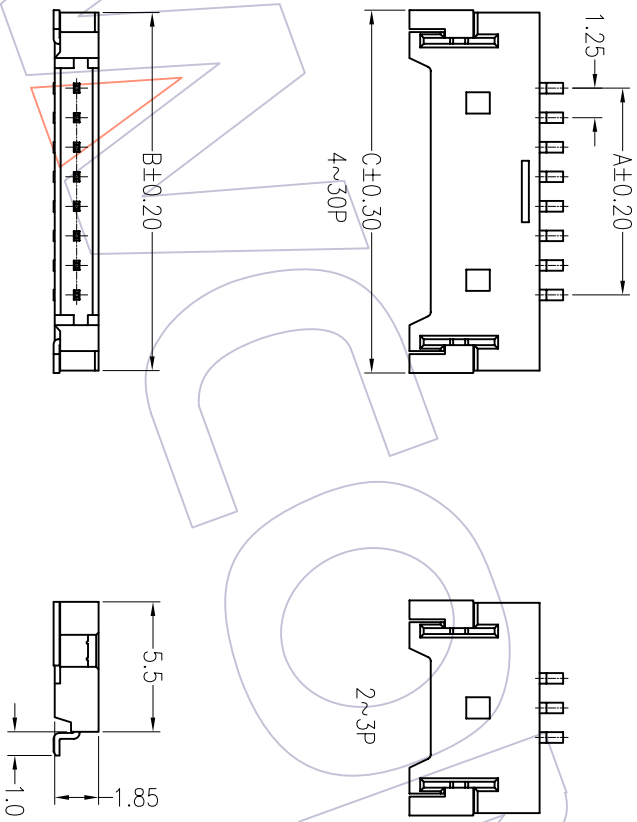

Specification & Ordering Information:

| Circuit | Part No. | Dimension | | | Q'ty/Reel |
|---------|----------------|-----------|-------|-------|-----------|
| | | A | B | C | |
| 02 | WF1254-WZ02XR1 | 1.25 | 7.65 | 7.85 | 2,000 |
| 03 | WF1254-WZ03XR1 | 2.50 | 8.90 | 9.10 | 2,000 |
| 04 | WF1254-WZ04XR1 | 3.75 | 10.15 | 10.35 | 2,000 |
| 05 | WF1254-WZ05XR1 | 5.00 | 11.40 | 11.60 | 2,000 |
| 06 | WF1254-WZ06XR1 | 6.25 | 12.65 | 12.85 | 2,000 |
| 07 | WF1254-WZ07XR1 | 7.50 | 13.90 | 14.10 | 2,000 |
| 08 | WF1254-WZ08XR1 | 8.75 | 15.15 | 15.35 | 2,000 |
| 09 | WF1254-WZ09XR1 | 10.00 | 16.40 | 16.60 | 2,000 |
| 10 | WF1254-WZ10XR1 | 11.25 | 17.65 | 17.85 | 2,000 |
| 11 | WF1254-WZ11XR1 | 12.50 | 18.90 | 19.10 | 2,000 |
| 12 | WF1254-WZ12XR1 | 13.75 | 20.15 | 20.35 | 2,000 |
| 13 | WF1254-WZ13XR1 | 15.00 | 21.40 | 21.60 | 2,000 |
| 14 | WF1254-WZ14XR1 | 16.25 | 22.65 | 22.85 | 2,000 |
| 15 | WF1254-WZ15XR1 | 17.50 | 23.90 | 24.10 | 2,000 |
| 16 | WF1254-WZ16XR1 | 18.75 | 25.15 | 25.35 | 2,000 |
| 17 | WF1254-WZ17XR1 | 20.00 | 26.40 | 26.60 | 2,000 |
| 18 | WF1254-WZ18XR1 | 21.25 | 27.65 | 27.85 | 2,000 |
| 19 | WF1254-WZ19XR1 | 22.50 | 28.90 | 29.10 | 2,000 |
| 20 | WF1254-WZ20XR1 | 23.75 | 30.15 | 30.35 | 2,000 |
| 30 | WF1254-WZ30XR1 | 36.25 | 42.65 | 42.85 | 2,000 |

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.10)

WCON 维峰五金电子有限公司
 WAFER HARDWARE ELECTRONICS CO. LTD

PART NO. WF1254-WZXXXXX1
 TITLE: 1.25 WAFER 90° SMT

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | APPROVE | OPERATION | | DRAW | 2012.04.04 | 08.07.19 | SCALE | | PART NO. | TITLE: |
|-----|----------|--------------------------|--------|---------|-----------|-------|---------|------------|----------|-------|-------|-----------------|--------------------|
| | | | | | XXX | ±0.25 | | | | UNIT | SIZE | | |
| A0 | 08/07/19 | NEW | | | XXX | ±0.13 | DESIGN | | | mm | A4 | WF1254-WZXXXXX1 | 1.25 WAFER 90° SMT |
| | | | | | Angle | ± 3' | CHECK | | | | 1/1 | | |
| | | | | | DIM | TOL | APPROVE | | | | PROJ. | | |